


HLSPE-MT

MT柄引ネジ付ヘリカルスパイラルエンドミル

Helical Spiral End Mill with Drawing Thread MT Shank

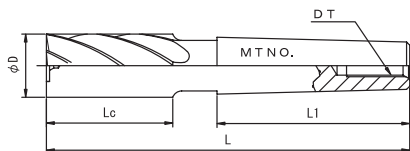

HSS-Co 右ネジレ30°

外径許容差(φD) $\begin{matrix} +0.2 \\ 0 \end{matrix}$

外径 φD	柄 NO.	刃長 Lc	全長 L	柄長 L1	ネジ DT	刃数
14	MT2	40	118	68	M10	4
15	MT2	45	123	68	M10	4
16	MT2	45	123	68	M10	4
18	MT2	45	123	68	M10	4
20	MT2	50	128	68	M10	4
22	MT2	50	128	68	M10	4
24	MT2	55	133	68	M10	4
25	MT3	55	152	85	M12	4
26	MT3	55	152	85	M12	4
28	MT3	60	157	85	M12	4
30	MT3	60	157	85	M12	4
32	MT3	65	162	85	M12	4
34	MT3	65	162	85	M12	4
35	MT4	65	190	108	M16	4
36	MT4	70	195	108	M16	4
38	MT4	70	195	108	M16	4
40	MT4	70	195	108	M16	4
42	MT4	70	195	108	M16	4
45	MT4	75	200	108	M16	4
50	MT4	75	200	108	M16	4
55	MT5	75	231	136	M20	4
60	MT5	80	236	136	M20	4

被削材種 型番	鋳物	炭素鋼	合金鋼	工具鋼	調質鋼	ステンレス鋼	アルミ合金	銅合金	チタン合金	耐熱合金
		FC, FCD	S45C	SCM	SKD	NAK, HPM	SUS	Al	Cu	Ti6Al4V
硬度	~300HB	~200HB	~250HB	~35HRC	~45HRC	~35HRC				
HLSPE-MT	○	○	○	○			○	○		

シャンク部形状 P.322