


TC-BS

BS柄Tスロットカッター

T-Slot Cutter with BS Shank

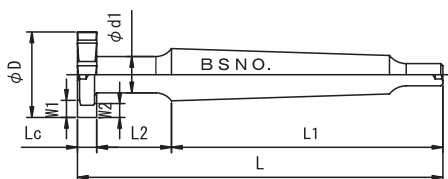

SKH51

外径許容差(φD) $\begin{matrix} +0.10 \\ +0.03 \end{matrix}$ 刃幅許容差(Lc) $\begin{matrix} +0.10 \\ +0.03 \end{matrix}$

外径 φD	刃幅 Lc	柄 No.	柄長 L1	首径 φd1	首長 L2	全長 L	サイド刃の長さ		刃数
							W1	W2	
10	2	BS7	92	4	16	110	2.5	1.5	6
10	3	BS7	92	4	16	111	2.5	1.5	6
10	4	BS7	92	4	16	112	2.5	1.5	6
10	5	BS7	92	4	16	113	2.5	1.5	6
10	6	BS7	92	4	16	114	2.5	1.5	6
10	7	BS7	92	4	16	115	2.5	1.5	6
10	8	BS7	92	4	16	116	2.5	1.5	6
10	9	BS7	92	4	16	117	2.5	1.5	6
10	10	BS7	92	4	16	118	2.5	1.5	6
12	2	BS7	92	4.5	16	110	3	1.75	6
12	3	BS7	92	4.5	16	111	3	1.75	6
12	4	BS7	92	4.5	16	112	3	1.75	6
12	5	BS7	92	4.5	16	113	3	1.75	6
12	6	BS7	92	4.5	16	114	3	1.75	6
12	7	BS7	92	4.5	16	115	3	1.75	6
12	8	BS7	92	4.5	16	116	3	1.75	6
12	9	BS7	92	4.5	16	117	3	1.75	6
12	10	BS7	92	4.5	16	118	3	1.75	6
12	12	BS7	92	4.5	16	120	3	1.75	6
13	2	BS7	92	5	16	110	2.5	1.75	8
13	3	BS7	92	5	16	111	2.5	1.75	8
13	4	BS7	92	5	16	112	2.5	1.75	8
13	5	BS7	92	5	16	113	2.5	1.75	8
13	6	BS7	92	5	16	114	2.5	1.75	8
13	7	BS7	92	5	16	115	2.5	1.75	8
13	8	BS7	92	5	16	116	2.5	1.75	8
13	9	BS7	92	5	16	117	2.5	1.75	8
13	10	BS7	92	5	16	118	2.5	1.75	8
13	12	BS7	92	5	16	120	2.5	1.75	8
14	3	BS7	92	5.5	16	111	2.5	1.75	8
14	4	BS7	92	5.5	16	112	2.5	1.75	8
14	5	BS7	92	5.5	16	113	2.5	1.75	8
14	6	BS7	92	5.5	16	114	2.5	1.75	8
14	7	BS7	92	5.5	16	115	2.5	1.75	8
14	8	BS7	92	5.5	16	116	2.5	1.75	8
14	9	BS7	92	5.5	16	117	2.5	1.75	8
14	10	BS7	92	5.5	16	118	2.5	1.75	8
14	12	BS7	92	5.5	16	120	2.5	1.75	8

被削材種 型番	硬度	鋳物	炭素鋼	合金鋼	工具鋼	調質鋼	ステンレス鋼	アルミ合金	銅合金	チタン合金	耐熱合金
		FC, FCD	S45C	SCM	SKD	NAK, HPM	SUS	Al	Cu	Ti6Al4V	インコネル
TC-BS	~200HB	○	○	○			△	○	○		

両側面のヌスミ(ニゲ)の深さ P.314

切削条件 P.293 シャンク部形状 P.321

TC-BS

BS柄Tスロットカッター

T-Slot Cutter with BS Shank

外径 φ D	刃幅 L c	柄 No.	柄長 L 1	首径 φ d 1	首長 L 2	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
15	2	BS7	92	6	16	110	3	2.25	8
15	3	BS7	92	6	16	111	3	2.25	8
15	4	BS7	92	6	16	112	3	2.25	8
15	5	BS7	92	6	16	113	3	2.25	8
15	6	BS7	92	6	16	114	3	2.25	8
15	7	BS7	92	6	16	115	3	2.25	8
15	8	BS7	92	6	16	116	3	2.25	8
15	9	BS7	92	6	16	117	3	2.25	8
15	10	BS7	92	6	16	118	3	2.25	8
15	12	BS7	92	6	16	120	3	2.25	8
16	3	BS7	92	6.5	16	111	3	2.25	8
16	4	BS7	92	6.5	16	112	3	2.25	8
16	5	BS7	92	6.5	16	113	3	2.25	8
16	6	BS7	92	6.5	16	114	3	2.25	8
16	7	BS7	92	6.5	16	115	3	2.25	8
16	8	BS7	92	6.5	16	116	3	2.25	8
16	9	BS7	92	6.5	16	117	3	2.25	8
16	10	BS7	92	6.5	16	118	3	2.25	8
16	12	BS7	92	6.5	16	120	3	2.25	8
18	3	BS7	92	7.5	17	112	3.5	2.5	8
18	4	BS7	92	7.5	17	113	3.5	2.5	8
18	5	BS7	92	7.5	17	114	3.5	2.5	8
18	6	BS7	92	7.5	17	115	3.5	2.5	8
18	7	BS7	92	7.5	17	116	3.5	2.5	8
18	8	BS7	92	7.5	17	117	3.5	2.5	8
18	9	BS7	92	7.5	17	118	3.5	2.5	8
18	10	BS7	92	7.5	17	119	3.5	2.5	8
18	12	BS7	92	7.5	17	121	3.5	2.5	8
18	14	BS7	92	7.5	17	123	3.5	2.5	8
19	2	BS7	92	8	17	111	3.5	2.75	8
19	3	BS7	92	8	17	112	3.5	2.75	8
19	4	BS7	92	8	17	113	3.5	2.75	8
19	5	BS7	92	8	17	114	3.5	2.75	8
19	6	BS7	92	8	17	115	3.5	2.75	8
19	7	BS7	92	8	17	116	3.5	2.75	8
19	8	BS7	92	8	17	117	3.5	2.75	8
19	9	BS7	92	8	17	118	3.5	2.75	8
19	10	BS7	92	8	17	119	3.5	2.75	8
19	11	BS7	92	8	17	120	3.5	2.75	8
19	12	BS7	92	8	17	121	3.5	2.75	8
20	2	BS7	92	8.5	21	115	4	3	8
20	3	BS7	92	8.5	21	116	4	3	8
20	4	BS7	92	8.5	21	117	4	3	8
20	5	BS7	92	8.5	21	118	4	3	8
20	6	BS7	92	8.5	21	119	4	3	8
20	7	BS7	92	8.5	21	120	4	3	8
20	8	BS7	92	8.5	21	121	4	3	8
20	9	BS7	92	8.5	21	122	4	3	8
20	10	BS7	92	8.5	21	123	4	3	8
20	11	BS7	92	8.5	21	124	4	3	8
20	12	BS7	92	8.5	21	125	4	3	8
20	13	BS7	92	8.5	21	126	4	3	8
20	14	BS7	92	8.5	21	127	4	3	8
20	15	BS7	92	8.5	21	128	4	3	8
20	16	BS7	92	8.5	21	129	4	3	8

TC-BS

BS柄Tスロットカッター

T-Slot Cutter with BS Shank

外径 φ D	刃幅 L c	柄 No.	柄長 L 1	首径 φ d 1	首長 L 2	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
22	2	BS7	92	9.5	21	115	4.5	3	10
22	3	BS7	92	9.5	21	116	4.5	3	10
22	4	BS7	92	9.5	21	117	4.5	3	10
22	5	BS7	92	9.5	21	118	4.5	3	10
22	6	BS7	92	9.5	21	119	4.5	3	10
22	7	BS7	92	9.5	21	120	4.5	3	10
22	8	BS7	92	9.5	21	121	4.5	3	10
22	9	BS7	92	9.5	21	122	4.5	3	10
22	10	BS7	92	9.5	21	123	4.5	3	10
22	11	BS7	92	9.5	21	124	4.5	3	10
22	12	BS7	92	9.5	21	125	4.5	3	10
22	13	BS7	92	9.5	21	126	4.5	3	10
22	15	BS7	92	9.5	21	128	4.5	3	10
22	16	BS7	92	9.5	21	129	4.5	3	10
24	2	BS7	92	10.5	22	116	4.5	3	10
24	3	BS7	92	10.5	22	117	4.5	3	10
24	4	BS7	92	10.5	22	118	4.5	3	10
24	5	BS7	92	10.5	22	119	4.5	3	10
24	6	BS7	92	10.5	22	120	4.5	3	10
24	7	BS7	92	10.5	22	121	4.5	3	10
24	8	BS7	92	10.5	22	122	4.5	3	10
24	9	BS7	92	10.5	22	123	4.5	3	10
24	10	BS7	92	10.5	22	124	4.5	3	10
24	11	BS7	92	10.5	22	125	4.5	3	10
24	12	BS7	92	10.5	22	126	4.5	3	10
24	13	BS7	92	10.5	22	127	4.5	3	10
24	14	BS7	92	10.5	22	128	4.5	3	10
24	15	BS7	92	10.5	22	129	4.5	3	10
25	2	BS7	92	11	22	116	4.5	3	10
25	3	BS7	92	11	22	117	4.5	3	10
25	4	BS7	92	11	22	118	4.5	3	10
25	5	BS7	92	11	22	119	4.5	3	10
25	6	BS7	92	11	22	120	4.5	3	10
25	7	BS7	92	11	22	121	4.5	3	10
25	8	BS7	92	11	22	122	4.5	3	10
25	9	BS7	92	11	22	123	4.5	3	10
25	10	BS7	92	11	22	124	4.5	3	10
25	11	BS7	92	11	22	125	4.5	3	10
25	12	BS7	92	11	22	126	4.5	3	10
25	13	BS7	92	11	22	127	4.5	3	10
25	14	BS7	92	11	22	128	4.5	3	10
25	15	BS7	92	11	22	129	4.5	3	10
25	16	BS7	92	11	22	130	4.5	3	10
26	3	BS7	92	11.5	26	121	4.5	3	10
26	4	BS7	92	11.5	26	122	4.5	3	10
26	5	BS7	92	11.5	26	123	4.5	3	10
26	6	BS7	92	11.5	26	124	4.5	3	10
26	7	BS7	92	11.5	26	125	4.5	3	10
26	8	BS7	92	11.5	26	126	4.5	3	10
26	9	BS7	92	11.5	26	127	4.5	3	10
26	10	BS7	92	11.5	26	128	4.5	3	10
26	11	BS7	92	11.5	26	129	4.5	3	10
26	12	BS7	92	11.5	26	130	4.5	3	10
26	13	BS7	92	11.5	26	131	4.5	3	10
26	14	BS7	92	11.5	26	132	4.5	3	10
26	15	BS7	92	11.5	26	133	4.5	3	10

TC-BS

BS柄Tスロットカッター

T-Slot Cutter with BS Shank

外径 φ D	刃幅 L c	柄 N o.	柄長 L 1	首径 φ d 1	首長 L 2	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
26	16	BS7	92	11.5	26	134	4.5	3	10
28	3	BS7	92	12.5	26	121	5	3.5	10
28	4	BS7	92	12.5	26	122	5	3.5	10
28	5	BS7	92	12.5	26	123	5	3.5	10
28	6	BS7	92	12.5	26	124	5	3.5	10
28	7	BS7	92	12.5	26	125	5	3.5	10
28	8	BS7	92	12.5	26	126	5	3.5	10
28	9	BS7	92	12.5	26	127	5	3.5	10
28	10	BS7	92	12.5	26	128	5	3.5	10
28	11	BS7	92	12.5	26	129	5	3.5	10
28	12	BS7	92	12.5	26	130	5	3.5	10
28	13	BS7	92	12.5	26	131	5	3.5	10
28	14	BS7	92	12.5	26	132	5	3.5	10
28	15	BS7	92	12.5	26	133	5	3.5	10
28	16	BS7	92	12.5	26	134	5	3.5	10
30	3	BS7	92	13.5	28	123	5.5	4	10
30	4	BS7	92	13.5	28	124	5.5	4	10
30	5	BS7	92	13.5	28	125	5.5	4	10
30	6	BS7	92	13.5	28	126	5.5	4	10
30	7	BS7	92	13.5	28	127	5.5	4	10
30	8	BS7	92	13.5	28	128	5.5	4	10
30	9	BS7	92	13.5	28	129	5.5	4	10
30	10	BS7	92	13.5	28	130	5.5	4	10
30	11	BS7	92	13.5	28	131	5.5	4	10
30	12	BS7	92	13.5	28	132	5.5	4	10
30	13	BS7	92	13.5	28	133	5.5	4	10
30	14	BS7	92	13.5	28	134	5.5	4	10
30	15	BS7	92	13.5	28	135	5.5	4	10
30	16	BS7	92	13.5	28	136	5.5	4	10
30	18	BS7	92	13.5	28	138	5.5	4	10
30	20	BS7	92	13.5	28	140	5.5	4	10
32	3	BS7	92	14.5	28	123	6	4	10
32	4	BS7	92	14.5	28	124	6	4	10
32	5	BS7	92	14.5	28	125	6	4	10
32	6	BS7	92	14.5	28	126	6	4	10
32	7	BS7	92	14.5	28	127	6	4	10
32	8	BS7	92	14.5	28	128	6	4	10
32	9	BS7	92	14.5	28	129	6	4	10
32	10	BS7	92	14.5	28	130	6	4	10
32	11	BS7	92	14.5	28	131	6	4	10
32	12	BS7	92	14.5	28	132	6	4	10
32	13	BS7	92	14.5	28	133	6	4	10
32	14	BS7	92	14.5	28	134	6	4	10
32	15	BS7	92	14.5	28	135	6	4	10
32	16	BS7	92	14.5	28	136	6	4	10
32	18	BS7	92	14.5	28	138	6	4	10
32	20	BS7	92	14.5	28	140	6	4	10
35	3	BS7	92	16	28	123	6	4.5	12
35	4	BS7	92	16	28	124	6	4.5	12
35	5	BS7	92	16	28	125	6	4.5	12
35	6	BS7	92	16	28	126	6	4.5	12
35	7	BS7	92	16	28	127	6	4.5	12
35	8	BS7	92	16	28	128	6	4.5	12
35	9	BS7	92	16	28	129	6	4.5	12
35	10	BS7	92	16	28	130	6	4.5	12

TC-BS

BS柄Tスロットカッター

T-Slot Cutter with BS Shank

外径 φ D	刃幅 L c	柄 No.	柄長 L 1	首径 φ d 1	首長 L 2	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
35	11	BS7	92	16	28	131	6	4.5	12
35	12	BS7	92	16	28	132	6	4.5	12
35	13	BS7	92	16	28	133	6	4.5	12
35	14	BS7	92	16	28	134	6	4.5	12
35	15	BS7	92	16	28	135	6	4.5	12
35	16	BS7	92	16	28	136	6	4.5	12
35	17	BS7	92	16	28	137	6	4.5	12
35	18	BS7	92	16	28	138	6	4.5	12
38	3	BS7	92	17.5	34	129	7	5.5	12
38	4	BS7	92	17.5	34	130	7	5.5	12
38	5	BS7	92	17.5	34	131	7	5.5	12
38	6	BS7	92	17.5	34	132	7	5.5	12
38	7	BS7	92	17.5	34	133	7	5.5	12
38	8	BS7	92	17.5	34	134	7	5.5	12
38	9	BS7	92	17.5	34	135	7	5.5	12
38	10	BS7	92	17.5	34	136	7	5.5	12
38	11	BS7	92	17.5	34	137	7	5.5	12
38	12	BS7	92	17.5	34	138	7	5.5	12
38	13	BS7	92	17.5	34	139	7	5.5	12
38	14	BS7	92	17.5	34	140	7	5.5	12
38	15	BS7	92	17.5	34	141	7	5.5	12
38	16	BS7	92	17.5	34	142	7	5.5	12
38	18	BS7	92	17.5	34	144	7	5.5	12
38	20	BS7	92	17.5	34	146	7	5.5	12
40	3	BS7	92	18	34	129	7.5	6	12
40	4	BS7	92	18	34	130	7.5	6	12
40	5	BS7	92	18	34	131	7.5	6	12
40	6	BS7	92	18	34	132	7.5	6	12
40	7	BS7	92	18	34	133	7.5	6	12
40	8	BS7	92	18	34	134	7.5	6	12
40	9	BS7	92	18	34	135	7.5	6	12
40	10	BS7	92	18	34	136	7.5	6	12
40	11	BS7	92	18	34	137	7.5	6	12
40	12	BS7	92	18	34	138	7.5	6	12
40	13	BS7	92	18	34	139	7.5	6	12
40	14	BS7	92	18	34	140	7.5	6	12
40	15	BS7	92	18	34	141	7.5	6	12
40	16	BS7	92	18	34	142	7.5	6	12
40	17	BS7	92	18	34	143	7.5	6	12
40	18	BS7	92	18	34	144	7.5	6	12
40	19	BS7	92	18	34	145	7.5	6	12
40	20	BS7	92	18	34	146	7.5	6	12
45	3	BS7	92	20	37	132	9	7	12
45	4	BS7	92	20	37	133	9	7	12
45	5	BS7	92	20	37	134	9	7	12
45	6	BS7	92	20	37	135	9	7	12
45	7	BS7	92	20	37	136	9	7	12
45	8	BS7	92	20	37	137	9	7	12
45	9	BS7	92	20	37	138	9	7	12
45	10	BS7	92	20	37	139	9	7	12
45	11	BS7	92	20	37	140	9	7	12
45	12	BS7	92	20	37	141	9	7	12
45	13	BS7	92	20	37	142	9	7	12
45	14	BS7	92	20	37	143	9	7	12
45	15	BS7	92	20	37	144	9	7	12
45	16	BS7	92	20	37	145	9	7	12

TC-BS

BS柄Tスロットカッター

T-Slot Cutter with BS Shank

外径 φ D	刃幅 L c	柄 N o.	柄長 L 1	首径 φ d 1	首長 L 2	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
45	17	BS7	92	20	37	146	9	7	12
45	18	BS7	92	20	37	147	9	7	12
45	20	BS7	92	20	37	149	9	7	12
48	3	BS7	92	21.5	37	132	9.5	7.5	12
48	4	BS7	92	21.5	37	133	9.5	7.5	12
48	5	BS7	92	21.5	37	134	9.5	7.5	12
48	6	BS7	92	21.5	37	135	9.5	7.5	12
48	7	BS7	92	21.5	37	136	9.5	7.5	12
48	8	BS7	92	21.5	37	137	9.5	7.5	12
48	9	BS7	92	21.5	37	138	9.5	7.5	12
48	10	BS7	92	21.5	37	139	9.5	7.5	12
48	11	BS7	92	21.5	37	140	9.5	7.5	12
48	12	BS7	92	21.5	37	141	9.5	7.5	12
48	13	BS7	92	21.5	37	142	9.5	7.5	12
48	14	BS7	92	21.5	37	143	9.5	7.5	12
48	15	BS7	92	21.5	37	144	9.5	7.5	12
48	16	BS7	92	21.5	37	145	9.5	7.5	12
48	18	BS7	92	21.5	37	147	9.5	7.5	12
48	20	BS7	92	21.5	37	149	9.5	7.5	12
50	3	BS7	92	22.5	45	140	10	7.5	14
50	4	BS7	92	22.5	45	141	10	7.5	14
50	5	BS7	92	22.5	45	142	10	7.5	14
50	6	BS7	92	22.5	45	143	10	7.5	14
50	7	BS7	92	22.5	45	144	10	7.5	14
50	8	BS7	92	22.5	45	145	10	7.5	14
50	9	BS7	92	22.5	45	146	10	7.5	14
50	10	BS7	92	22.5	45	147	10	7.5	14
50	11	BS7	92	22.5	45	148	10	7.5	14
50	12	BS7	92	22.5	45	149	10	7.5	14
50	13	BS7	92	22.5	45	150	10	7.5	14
50	14	BS7	92	22.5	45	151	10	7.5	14
50	15	BS7	92	22.5	45	152	10	7.5	14
50	16	BS7	92	22.5	45	153	10	7.5	14
50	18	BS7	92	22.5	45	155	10	7.5	14
50	20	BS7	92	22.5	45	157	10	7.5	14
50	22	BS7	92	22.5	45	159	10	7.5	14
55	4	BS7	92	25	45	141	11	8.5	14
55	5	BS7	92	25	45	142	11	8.5	14
55	6	BS7	92	25	45	143	11	8.5	14
55	7	BS7	92	25	45	144	11	8.5	14
55	8	BS7	92	25	45	145	11	8.5	14
55	9	BS7	92	25	45	146	11	8.5	14
55	10	BS7	92	25	45	147	11	8.5	14
55	12	BS7	92	25	45	149	11	8.5	14
55	14	BS7	92	25	45	151	11	8.5	14
55	15	BS7	92	25	45	152	11	8.5	14
55	16	BS7	92	25	45	153	11	8.5	14
55	18	BS7	92	25	45	155	11	8.5	14
55	20	BS7	92	25	45	157	11	8.5	14
60	4	BS7	92	30	45	141	12	8.5	14
60	5	BS7	92	30	45	142	12	8.5	14
60	6	BS7	92	30	45	143	12	8.5	14
60	7	BS7	92	30	45	144	12	8.5	14
60	8	BS7	92	30	45	145	12	8.5	14
60	9	BS7	92	30	45	146	12	8.5	14

TC-BS

BS柄Tスロットカッター

T-Slot Cutter with BS Shank

外径 φ D	刃幅 L c	柄 No.	柄長 L 1	首径 φ d 1	首長 L 2	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
60	10	BS7	92	30	45	147	12	8.5	14
60	11	BS7	92	30	45	148	12	8.5	14
60	12	BS7	92	30	45	149	12	8.5	14
60	14	BS7	92	30	45	151	12	8.5	14
60	15	BS7	92	30	45	152	12	8.5	14
60	16	BS7	92	30	45	153	12	8.5	14
50	5	BS9	120	22.5	45	170	10	7.5	14
50	6	BS9	120	22.5	45	171	10	7.5	14
50	7	BS9	120	22.5	45	172	10	7.5	14
50	8	BS9	120	22.5	45	173	10	7.5	14
50	10	BS9	120	22.5	45	175	10	7.5	14
50	12	BS9	120	22.5	45	177	10	7.5	14
50	14	BS9	120	22.5	45	179	10	7.5	14
50	15	BS9	120	22.5	45	180	10	7.5	14
50	16	BS9	120	22.5	45	181	10	7.5	14
50	18	BS9	120	22.5	45	183	10	7.5	14
50	20	BS9	120	22.5	45	185	10	7.5	14
50	22	BS9	120	22.5	45	187	10	7.5	14
55	4	BS9	120	25	45	169	11	8.5	14
55	5	BS9	120	25	45	170	11	8.5	14
55	6	BS9	120	25	45	171	11	8.5	14
55	7	BS9	120	25	45	172	11	8.5	14
55	8	BS9	120	25	45	173	11	8.5	14
55	10	BS9	120	25	45	175	11	8.5	14
55	12	BS9	120	25	45	177	11	8.5	14
55	14	BS9	120	25	45	179	11	8.5	14
55	16	BS9	120	25	45	181	11	8.5	14
55	20	BS9	120	25	45	185	11	8.5	14
60	5	BS9	120	30	45	170	12	8.5	14
60	6	BS9	120	30	45	171	12	8.5	14
60	7	BS9	120	30	45	172	12	8.5	14
60	8	BS9	120	30	45	173	12	8.5	14
60	10	BS9	120	30	45	175	12	8.5	14
60	12	BS9	120	30	45	177	12	8.5	14
60	14	BS9	120	30	45	179	12	8.5	14
60	16	BS9	120	30	45	181	12	8.5	14
60	18	BS9	120	30	45	183	12	8.5	14
60	20	BS9	120	30	45	185	12	8.5	14
60	22	BS9	120	30	45	187	12	8.5	14
60	25	BS9	120	30	45	190	12	8.5	14
65	10	BS9	120	33	45	175	13	10	16
65	12	BS9	120	33	45	177	13	10	16
65	15	BS9	120	33	45	180	13	10	16
65	16	BS9	120	33	45	181	13	10	16
65	18	BS9	120	33	45	183	13	10	16
65	20	BS9	120	33	45	185	13	10	16
65	22	BS9	120	33	45	187	13	10	16
65	25	BS9	120	33	45	190	13	10	16
65	30	BS9	120	33	45	195	13	10	16
70	10	BS9	120	33	45	175	14	11	16
70	11	BS9	120	33	45	176	14	11	16
70	12	BS9	120	33	45	177	14	11	16
70	13	BS9	120	33	45	178	14	11	16
70	14	BS9	120	33	45	179	14	11	16

TC-BS

BS柄Tスロットカッター

T-Slot Cutter with BS Shank

外径 φ D	刃幅 L c	柄 No.	柄長 L 1	首径 φ d 1	首長 L 2	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
70	15	BS9	120	33	45	180	14	11	16
70	16	BS9	120	33	45	181	14	11	16
70	18	BS9	120	33	45	183	14	11	16
70	20	BS9	120	33	45	185	14	11	16
70	22	BS9	120	33	45	187	14	11	16
70	24	BS9	120	33	45	189	14	11	16
70	25	BS9	120	33	45	190	14	11	16
70	30	BS9	120	33	45	195	14	11	16
75	6	BS9	120	33	45	171	15.5	12.5	16
75	8	BS9	120	33	45	173	15.5	12.5	16
75	10	BS9	120	33	45	175	15.5	12.5	16
75	12	BS9	120	33	45	177	15.5	12.5	16
75	14	BS9	120	33	45	179	15.5	12.5	16
75	15	BS9	120	33	45	180	15.5	12.5	16
75	16	BS9	120	33	45	181	15.5	12.5	16
75	18	BS9	120	33	45	183	15.5	12.5	16
75	20	BS9	120	33	45	185	15.5	12.5	16
75	22	BS9	120	33	45	187	15.5	12.5	16
75	24	BS9	120	33	45	189	15.5	12.5	16
75	25	BS9	120	33	45	190	15.5	12.5	16
75	28	BS9	120	33	45	193	15.5	12.5	16