


STC-LS

ロング柄千鳥刃Tスロットカッター

Long Shank Staggered Tooth T-Slot Cutter

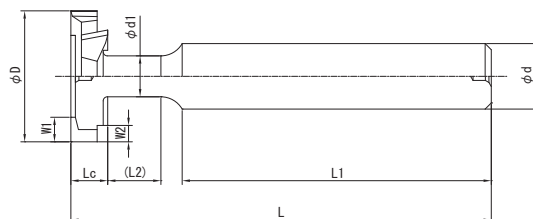

SKH56 交互ネジレ

外径許容差(φD) +0.10
+0.03 刃幅許容差(Lc) +0.10
+0.03

外径 φD	刃幅 Lc	柄径 φd	柄長 L1	首径 φd1	首長(フラット) (L2)	全長 L	サイド刃の長さ		刃数
							W1	W2	
10	2	12	75	5	17.5	100	2.5	1.5	6
10	2.5	12	75	5	17	100	2.5	1.5	6
10	3	12	75	5	16.5	100	2.5	1.5	6
10	3.5	12	75	5	16	100	2.5	1.5	6
10	4	12	75	5	15.5	100	2.5	1.5	6
10	4.5	12	75	5	15	100	2.5	1.5	6
10	5	12	75	5	14.5	100	2.5	1.5	6
10	5.5	12	75	5	14	100	2.5	1.5	6
10	6	12	75	5	13.5	100	2.5	1.5	6
10	7	12	75	5	12.5	100	2.5	1.5	6
10	8	12	70	5	16.5	100	2.5	1.5	6
10	9	12	70	5	15.5	100	2.5	1.5	6
10	10	12	70	5	14.5	100	2.5	1.5	6
11	3	12	75	5.5	16.6	100	2.75	1.75	6
11	4	12	75	5.5	15.6	100	2.75	1.75	6
11	5	12	75	5.5	14.6	100	2.75	1.75	6
11	6	12	75	5.5	13.6	100	2.75	1.75	6
11	7	12	75	5.5	12.6	100	2.75	1.75	6
11	8	12	70	5.5	16.6	100	2.75	1.75	6
11	9	12	70	5.5	15.6	100	2.75	1.75	6
11	10	12	70	5.5	14.6	100	2.75	1.75	6
12	2	12	75	6	17.8	100	3	1.75	6
12	2.5	12	75	6	17.3	100	3	1.75	6
12	3	12	75	6	16.8	100	3	1.75	6
12	3.5	12	75	6	16.3	100	3	1.75	6
12	4	12	75	6	15.8	100	3	1.75	6
12	4.5	12	75	6	15.3	100	3	1.75	6
12	5	12	75	6	14.8	100	3	1.75	6
12	5.5	12	75	6	14.3	100	3	1.75	6
12	6	12	75	6	13.8	100	3	1.75	6
12	7	12	75	6	12.8	100	3	1.75	6
12	8	12	70	6	16.8	100	3	1.75	6
12	9	12	70	6	15.8	100	3	1.75	6
12	10	12	70	6	14.8	100	3	1.75	6
13	2	12	75	6.5	18.5	100	2.5	1.75	6
13	2.5	12	75	6.5	18	100	2.5	1.75	6

被削材種 型番	硬度	鋳物	炭素鋼	合金鋼	工具鋼	調質鋼	ステンレス鋼	アルミ合金	銅合金	チタン合金	耐熱合金
		FC,FCD	S45C	SCM	SKD	NAK,HPM	SUS	Al	Cu	Ti6Al4V	インコネル
STC-LS	~200HB	○	○	○	△		○	○	○		

首長(L2)寸法は、首径(φd1)と柄径(φd)のつながりがRのため参考値です。

交互刃のため、外周加工面に段差が出来ますので荒用としてご使用ください。

切削条件 P.286

両側面のヌスミ(ニゲ)の深さ P.304

STC-LS

ロング柄千鳥刃Tスロットカッター

Long Shank Staggered Tooth T-Slot Cutter

外径 φ D	刃幅 L c	柄径 φ d	柄長 L 1	首径 φ d 1	首長(フラット) (L 2)	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
13	3	12	75	6.5	17.5	100	2.5	1.75	6
13	3.5	12	75	6.5	17	100	2.5	1.75	6
13	4	12	75	6.5	16.5	100	2.5	1.75	6
13	4.5	12	75	6.5	16	100	2.5	1.75	6
13	5	12	75	6.5	15.5	100	2.5	1.75	6
13	5.5	12	75	6.5	15	100	2.5	1.75	6
13	6	12	75	6.5	14.5	100	2.5	1.75	6
13	7	12	75	6.5	13.5	100	2.5	1.75	6
13	8	12	70	6.5	17.5	100	2.5	1.75	6
13	9	12	70	6.5	16.5	100	2.5	1.75	6
13	10	12	70	6.5	15.5	100	2.5	1.75	6
13	12	12	70	6.5	13.5	100	2.5	1.75	6
14	2	12	75	7	18.9	100	2.5	1.75	6
14	2.5	12	75	7	18.4	100	2.5	1.75	6
14	3	12	75	7	17.9	100	2.5	1.75	6
14	3.5	12	75	7	17.4	100	2.5	1.75	6
14	4	12	75	7	16.9	100	2.5	1.75	6
14	4.5	12	75	7	16.4	100	2.5	1.75	6
14	5	12	75	7	15.9	100	2.5	1.75	6
14	5.5	12	75	7	15.4	100	2.5	1.75	6
14	6	12	75	7	14.9	100	2.5	1.75	6
14	7	12	75	7	13.9	100	2.5	1.75	6
14	8	12	70	7	17.9	100	2.5	1.75	6
14	9	12	70	7	16.9	100	2.5	1.75	6
14	10	12	70	7	15.9	100	2.5	1.75	6
14	12	12	70	7	13.9	100	2.5	1.75	6
15	2	12	75	7	18.9	100	3	2.25	6
15	2.5	12	75	7	18.4	100	3	2.25	6
15	3	12	75	7	17.9	100	3	2.25	6
15	3.5	12	75	7	17.4	100	3	2.25	6
15	4	12	75	7	16.9	100	3	2.25	6
15	4.5	12	75	7	16.4	100	3	2.25	6
15	5	12	75	7	15.9	100	3	2.25	6
15	5.5	12	75	7	15.4	100	3	2.25	6
15	6	12	75	7	14.9	100	3	2.25	6
15	7	12	75	7	13.9	100	3	2.25	6
15	8	12	70	7	17.9	100	3	2.25	6
15	9	12	70	7	16.9	100	3	2.25	6
15	10	12	70	7	15.9	100	3	2.25	6
15	11	12	70	7	14.9	100	3	2.25	6
15	12	12	70	7	13.9	100	3	2.25	6
15	13	12	65	7	17.9	100	3	2.25	6
15	14	12	65	7	16.9	100	3	2.25	6
16	2	12	95	8	19.2	120	3	2.25	6
16	2.5	12	95	8	18.7	120	3	2.25	6
16	3	12	95	8	18.2	120	3	2.25	6
16	3.5	12	95	8	17.7	120	3	2.25	6
16	4	12	95	8	17.2	120	3	2.25	6
16	4.5	12	95	8	16.7	120	3	2.25	6
16	5	12	95	8	16.2	120	3	2.25	6
16	5.5	12	95	8	15.7	120	3	2.25	6
16	6	12	95	8	15.2	120	3	2.25	6
16	7	12	95	8	14.2	120	3	2.25	6
16	8	12	90	8	18.2	120	3	2.25	6
16	9	12	90	8	17.2	120	3	2.25	6
16	10	12	90	8	16.2	120	3	2.25	6

STC-LS

ロング柄千鳥刃Tスロットカッター

Long Shank Staggered Tooth T-Slot Cutter

外径 φ D	刃幅 L c	柄径 φ d	柄長 L 1	首径 φ d 1	首長(フラット) (L 2)	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
16	11	12	90	8	15.2	120	3	2.25	6
16	12	12	90	8	14.2	120	3	2.25	6
16	13	12	85	8	18.2	120	3	2.25	6
16	14	12	85	8	17.2	120	3	2.25	6
16	15	12	85	8	16.2	120	3	2.25	6
16	16	12	85	8	15.2	120	3	2.25	6
18	2	12	95	9	19.8	120	3.5	2.5	6
18	2.5	12	95	9	19.3	120	3.5	2.5	6
18	3	12	95	9	18.8	120	3.5	2.5	6
18	3.5	12	95	9	18.3	120	3.5	2.5	6
18	4	12	95	9	17.8	120	3.5	2.5	6
18	4.5	12	95	9	17.3	120	3.5	2.5	6
18	5	12	95	9	16.8	120	3.5	2.5	6
18	5.5	12	95	9	16.3	120	3.5	2.5	6
18	6	12	95	9	15.8	120	3.5	2.5	6
18	7	12	95	9	14.8	120	3.5	2.5	6
18	8	12	90	9	18.8	120	3.5	2.5	6
18	9	12	90	9	17.8	120	3.5	2.5	6
18	10	12	90	9	16.8	120	3.5	2.5	6
18	11	12	90	9	15.8	120	3.5	2.5	6
18	12	12	90	9	14.8	120	3.5	2.5	6
18	13	12	85	9	18.8	120	3.5	2.5	6
18	14	12	85	9	17.8	120	3.5	2.5	6
18	15	12	85	9	16.8	120	3.5	2.5	6
18	16	12	85	9	15.8	120	3.5	2.5	6
19	2	12	95	11	21.6	120	3.5	2.75	6
19	2.5	12	95	11	21.1	120	3.5	2.75	6
19	3	12	95	11	20.6	120	3.5	2.75	6
19	3.5	12	95	11	20.1	120	3.5	2.75	6
19	4	12	95	11	19.6	120	3.5	2.75	6
19	4.5	12	95	11	19.1	120	3.5	2.75	6
19	5	12	95	11	18.6	120	3.5	2.75	6
19	5.5	12	95	11	18.1	120	3.5	2.75	6
19	6	12	95	11	17.6	120	3.5	2.75	6
19	7	12	95	11	16.6	120	3.5	2.75	6
19	8	12	90	11	20.6	120	3.5	2.75	6
19	9	12	90	11	19.6	120	3.5	2.75	6
19	10	12	90	11	18.6	120	3.5	2.75	6
19	11	12	90	11	17.6	120	3.5	2.75	6
19	12	12	90	11	16.6	120	3.5	2.75	6
19	13	12	85	11	20.6	120	3.5	2.75	6
19	14	12	85	11	19.6	120	3.5	2.75	6
19	15	12	85	11	18.6	120	3.5	2.75	6
19	16	12	85	11	17.6	120	3.5	2.75	6
20	2	12	95	11	21.6	120	4	3	6
20	2.5	12	95	11	21.1	120	4	3	6
20	3	12	95	11	20.6	120	4	3	6
20	3.5	12	95	11	20.1	120	4	3	6
20	4	12	95	11	19.6	120	4	3	6
20	4.5	12	95	11	19.1	120	4	3	6
20	5	12	95	11	18.6	120	4	3	6
20	5.5	12	95	11	18.1	120	4	3	6
20	6	12	95	11	17.6	120	4	3	6
20	7	12	95	11	16.6	120	4	3	6
20	8	12	90	11	20.6	120	4	3	6
20	9	12	90	11	19.6	120	4	3	6

STC-LS

ロング柄千鳥刃Tスロットカッター

Long Shank Staggered Tooth T-Slot Cutter

外径 φ D	刃幅 L c	柄径 φ d	柄長 L 1	首径 φ d 1	首長(フラット) (L 2)	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
20	10	12	90	11	18.6	120	4	3	6
20	11	12	90	11	17.6	120	4	3	6
20	12	12	90	11	16.6	120	4	3	6
20	13	12	85	11	20.6	120	4	3	6
20	14	12	85	11	19.6	120	4	3	6
20	15	12	85	11	18.6	120	4	3	6
20	16	12	85	11	17.6	120	4	3	6
22	2	16	120	14	25.7	150	4.5	3	6
22	2.5	16	120	14	25.2	150	4.5	3	6
22	3	16	120	14	24.7	150	4.5	3	6
22	3.5	16	120	14	24.2	150	4.5	3	6
22	4	16	120	14	23.7	150	4.5	3	6
22	4.5	16	120	14	23.2	150	4.5	3	6
22	5	16	120	14	22.7	150	4.5	3	6
22	5.5	16	120	14	22.2	150	4.5	3	6
22	6	16	120	14	21.7	150	4.5	3	6
22	7	16	120	14	20.7	150	4.5	3	6
22	8	16	115	14	24.7	150	4.5	3	6
22	9	16	115	14	23.7	150	4.5	3	6
22	10	16	115	14	22.7	150	4.5	3	6
22	11	16	115	14	21.7	150	4.5	3	6
22	12	16	115	14	20.7	150	4.5	3	6
22	13	16	110	14	24.7	150	4.5	3	6
22	14	16	110	14	23.7	150	4.5	3	6
22	15	16	110	14	22.7	150	4.5	3	6
22	16	16	110	14	21.7	150	4.5	3	6
24	2	16	120	14	25.7	150	4.5	3	6
24	2.5	16	120	14	25.2	150	4.5	3	6
24	3	16	120	14	24.7	150	4.5	3	6
24	3.5	16	120	14	24.2	150	4.5	3	6
24	4	16	120	14	23.7	150	4.5	3	6
24	4.5	16	120	14	23.2	150	4.5	3	6
24	5	16	120	14	22.7	150	4.5	3	6
24	5.5	16	120	14	22.2	150	4.5	3	6
24	6	16	120	14	21.7	150	4.5	3	6
24	7	16	120	14	20.7	150	4.5	3	6
24	8	16	115	14	24.7	150	4.5	3	6
24	9	16	115	14	23.7	150	4.5	3	6
24	10	16	115	14	22.7	150	4.5	3	6
24	11	16	115	14	21.7	150	4.5	3	6
24	12	16	115	14	20.7	150	4.5	3	6
24	13	16	110	14	24.7	150	4.5	3	6
24	14	16	110	14	23.7	150	4.5	3	6
24	15	16	110	14	22.7	150	4.5	3	6
24	16	16	110	14	21.7	150	4.5	3	6
25	2	16	120	14	25.7	150	4.5	3	8
25	2.5	16	120	14	25.2	150	4.5	3	8
25	3	16	120	14	24.7	150	4.5	3	8
25	3.5	16	120	14	24.2	150	4.5	3	8
25	4	16	120	14	23.7	150	4.5	3	8
25	4.5	16	120	14	23.2	150	4.5	3	8
25	5	16	120	14	22.7	150	4.5	3	8
25	5.5	16	120	14	22.2	150	4.5	3	8
25	6	16	120	14	21.7	150	4.5	3	8
25	7	16	120	14	20.7	150	4.5	3	8
25	8	16	115	14	24.7	150	4.5	3	8

STC-LS

ロング柄千鳥刃Tスロットカッター

Long Shank Staggered Tooth T-Slot Cutter

外径 φ D	刃幅 L c	柄径 φ d	柄長 L 1	首径 φ d 1	首長(フラット) (L 2)	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
25	9	16	115	14	23.7	150	4.5	3	8
25	10	16	115	14	22.7	150	4.5	3	8
25	11	16	115	14	21.7	150	4.5	3	8
25	12	16	115	14	20.7	150	4.5	3	8
25	13	16	110	14	24.7	150	4.5	3	8
25	14	16	110	14	23.7	150	4.5	3	8
25	15	16	110	14	22.7	150	4.5	3	8
25	16	16	110	14	21.7	150	4.5	3	8
25	18	16	105	14	24.7	150	4.5	3	8
25	20	16	105	14	22.7	150	4.5	3	8
26	2	16	120	15	26.3	150	4.5	3	8
26	2.5	16	120	15	25.8	150	4.5	3	8
26	3	16	120	15	25.3	150	4.5	3	8
26	3.5	16	120	15	24.8	150	4.5	3	8
26	4	16	120	15	24.3	150	4.5	3	8
26	4.5	16	120	15	23.8	150	4.5	3	8
26	5	16	120	15	23.3	150	4.5	3	8
26	5.5	16	120	15	22.8	150	4.5	3	8
26	6	16	120	15	22.3	150	4.5	3	8
26	7	16	120	15	21.3	150	4.5	3	8
26	8	16	115	15	25.3	150	4.5	3	8
26	9	16	115	15	24.3	150	4.5	3	8
26	10	16	115	15	23.3	150	4.5	3	8
26	11	16	115	15	22.3	150	4.5	3	8
26	12	16	115	15	21.3	150	4.5	3	8
26	13	16	110	15	25.3	150	4.5	3	8
26	14	16	110	15	24.3	150	4.5	3	8
26	15	16	110	15	23.3	150	4.5	3	8
26	16	16	110	15	22.3	150	4.5	3	8
26	18	16	105	15	25.3	150	4.5	3	8
26	20	16	105	15	23.3	150	4.5	3	8
28	2	16	120	15	26.3	150	5	3.5	8
28	2.5	16	120	15	25.8	150	5	3.5	8
28	3	16	120	15	25.3	150	5	3.5	8
28	3.5	16	120	15	24.8	150	5	3.5	8
28	4	16	120	15	24.3	150	5	3.5	8
28	4.5	16	120	15	23.8	150	5	3.5	8
28	5	16	120	15	23.3	150	5	3.5	8
28	5.5	16	120	15	22.8	150	5	3.5	8
28	6	16	120	15	22.3	150	5	3.5	8
28	7	16	120	15	21.3	150	5	3.5	8
28	8	16	115	15	25.3	150	5	3.5	8
28	9	16	115	15	24.3	150	5	3.5	8
28	10	16	115	15	23.3	150	5	3.5	8
28	11	16	115	15	22.3	150	5	3.5	8
28	12	16	115	15	21.3	150	5	3.5	8
28	13	16	110	15	25.3	150	5	3.5	8
28	14	16	110	15	24.3	150	5	3.5	8
28	15	16	110	15	23.3	150	5	3.5	8
28	16	16	110	15	22.3	150	5	3.5	8
28	18	16	105	15	25.3	150	5	3.5	8
28	20	16	105	15	23.3	150	5	3.5	8
30	2	16	120	15	26.6	150	5.5	4	8
30	2.5	16	120	15	26.1	150	5.5	4	8
30	3	16	120	15	25.6	150	5.5	4	8
30	3.5	16	120	15	25.1	150	5.5	4	8

STC-LS

ロング柄千鳥刃Tスロットカッター

Long Shank Staggered Tooth T-Slot Cutter

外径 φ D	刃幅 L c	柄径 φ d	柄長 L 1	首径 φ d 1	首長(フラット) (L 2)	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
30	4	16	120	15	24.6	150	5.5	4	8
30	4.5	16	120	15	24.1	150	5.5	4	8
30	5	16	120	15	23.6	150	5.5	4	8
30	5.5	16	120	15	23.1	150	5.5	4	8
30	6	16	120	15	22.6	150	5.5	4	8
30	7	16	120	15	21.6	150	5.5	4	8
30	8	16	115	15	25.6	150	5.5	4	8
30	9	16	115	15	24.6	150	5.5	4	8
30	10	16	115	15	23.6	150	5.5	4	8
30	11	16	115	15	22.6	150	5.5	4	8
30	12	16	115	15	21.6	150	5.5	4	8
30	13	16	110	15	25.6	150	5.5	4	8
30	14	16	110	15	24.6	150	5.5	4	8
30	15	16	110	15	23.6	150	5.5	4	8
30	16	16	110	15	22.6	150	5.5	4	8
30	17	16	110	15	21.6	150	5.5	4	8
30	18	16	105	15	25.6	150	5.5	4	8
30	19	16	105	15	24.6	150	5.5	4	8
30	20	16	105	15	23.6	150	5.5	4	8
32	2	16	120	15	26.6	150	6	4	8
32	2.5	16	120	15	26.1	150	6	4	8
32	3	16	120	15	25.6	150	6	4	8
32	3.5	16	120	15	25.1	150	6	4	8
32	4	16	120	15	24.6	150	6	4	8
32	4.5	16	120	15	24.1	150	6	4	8
32	5	16	120	15	23.6	150	6	4	8
32	5.5	16	120	15	23.1	150	6	4	8
32	6	16	120	15	22.6	150	6	4	8
32	7	16	120	15	21.6	150	6	4	8
32	8	16	115	15	25.6	150	6	4	8
32	9	16	115	15	24.6	150	6	4	8
32	10	16	115	15	23.6	150	6	4	8
32	11	16	115	15	22.6	150	6	4	8
32	12	16	115	15	21.6	150	6	4	8
32	13	16	110	15	25.6	150	6	4	8
32	14	16	110	15	24.6	150	6	4	8
32	15	16	110	15	23.6	150	6	4	8
32	16	16	110	15	22.6	150	6	4	8
32	17	16	110	15	21.6	150	6	4	8
32	18	16	105	15	25.6	150	6	4	8
32	19	16	105	15	24.6	150	6	4	8
32	20	16	105	15	23.6	150	6	4	8
35	2	16	120	15	26.6	150	6	4.5	8
35	2.5	16	120	15	26.1	150	6	4.5	8
35	3	16	120	15	25.6	150	6	4.5	8
35	3.5	16	120	15	25.1	150	6	4.5	8
35	4	16	120	15	24.6	150	6	4.5	8
35	4.5	16	120	15	24.1	150	6	4.5	8
35	5	16	120	15	23.6	150	6	4.5	8
35	5.5	16	120	15	23.1	150	6	4.5	8
35	6	16	120	15	22.6	150	6	4.5	8
35	7	16	120	15	21.6	150	6	4.5	8
35	8	16	115	15	25.6	150	6	4.5	8
35	9	16	115	15	24.6	150	6	4.5	8
35	10	16	115	15	23.6	150	6	4.5	8
35	11	16	115	15	22.6	150	6	4.5	8
35	12	16	115	15	21.6	150	6	4.5	8

STC-LS

ロング柄千鳥刃Tスロットカッター

Long Shank Staggered Tooth T-Slot Cutter

外径 φ D	刃幅 L c	柄径 φ d	柄長 L 1	首径 φ d 1	首長(フラット) (L 2)	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
35	13	16	110	15	25.6	150	6	4.5	8
35	14	16	110	15	24.6	150	6	4.5	8
35	15	16	110	15	23.6	150	6	4.5	8
35	16	16	110	15	22.6	150	6	4.5	8
35	17	16	110	15	21.6	150	6	4.5	8
35	18	16	105	15	25.6	150	6	4.5	8
35	19	16	105	15	24.6	150	6	4.5	8
35	20	16	105	15	23.6	150	6	4.5	8
36	2	20	120	18	25.7	150	6.5	5	8
36	2.5	20	120	18	25.2	150	6.5	5	8
36	3	20	120	18	24.7	150	6.5	5	8
36	3.5	20	120	18	24.2	150	6.5	5	8
36	4	20	120	18	23.7	150	6.5	5	8
36	4.5	20	120	18	23.2	150	6.5	5	8
36	5	20	120	18	22.7	150	6.5	5	8
36	5.5	20	120	18	22.2	150	6.5	5	8
36	6	20	120	18	21.7	150	6.5	5	8
36	7	20	120	18	20.7	150	6.5	5	8
36	8	20	115	18	24.7	150	6.5	5	8
36	9	20	115	18	23.7	150	6.5	5	8
36	10	20	115	18	22.7	150	6.5	5	8
36	11	20	115	18	21.7	150	6.5	5	8
36	12	20	115	18	20.7	150	6.5	5	8
36	13	20	110	18	24.7	150	6.5	5	8
36	14	20	110	18	23.7	150	6.5	5	8
36	15	20	110	18	22.7	150	6.5	5	8
36	16	20	110	18	21.7	150	6.5	5	8
36	17	20	110	18	20.7	150	6.5	5	8
36	18	20	105	18	24.7	150	6.5	5	8
36	19	20	105	18	23.7	150	6.5	5	8
36	20	20	105	18	22.7	150	6.5	5	8
38	2	20	120	18	25.7	150	7	5.5	8
38	2.5	20	120	18	25.2	150	7	5.5	8
38	3	20	120	18	24.7	150	7	5.5	8
38	3.5	20	120	18	24.2	150	7	5.5	8
38	4	20	120	18	23.7	150	7	5.5	8
38	4.5	20	120	18	23.2	150	7	5.5	8
38	5	20	120	18	22.7	150	7	5.5	8
38	5.5	20	120	18	22.2	150	7	5.5	8
38	6	20	120	18	21.7	150	7	5.5	8
38	7	20	120	18	20.7	150	7	5.5	8
38	8	20	115	18	24.7	150	7	5.5	8
38	9	20	115	18	23.7	150	7	5.5	8
38	10	20	115	18	22.7	150	7	5.5	8
38	11	20	115	18	21.7	150	7	5.5	8
38	12	20	115	18	20.7	150	7	5.5	8
38	13	20	110	18	24.7	150	7	5.5	8
38	14	20	110	18	23.7	150	7	5.5	8
38	15	20	110	18	22.7	150	7	5.5	8
38	16	20	110	18	21.7	150	7	5.5	8
38	17	20	110	18	20.7	150	7	5.5	8
38	18	20	105	18	24.7	150	7	5.5	8
38	19	20	105	18	23.7	150	7	5.5	8
38	20	20	105	18	22.7	150	7	5.5	8
40	2	20	120	18	25.7	150	7.5	6	8
40	2.5	20	120	18	25.2	150	7.5	6	8

STC-LS

ロング柄千鳥刃Tスロットカッター

Long Shank Staggered Tooth T-Slot Cutter

外径 φ D	刃幅 L c	柄径 φ d	柄長 L 1	首径 φ d 1	首長(フラット) (L 2)	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
40	3	20	120	18	24.7	150	7.5	6	8
40	3.5	20	120	18	24.2	150	7.5	6	8
40	4	20	120	18	23.7	150	7.5	6	8
40	4.5	20	120	18	23.2	150	7.5	6	8
40	5	20	120	18	22.7	150	7.5	6	8
40	5.5	20	120	18	22.2	150	7.5	6	8
40	6	20	120	18	21.7	150	7.5	6	8
40	7	20	120	18	20.7	150	7.5	6	8
40	8	20	115	18	24.7	150	7.5	6	8
40	9	20	115	18	23.7	150	7.5	6	8
40	10	20	115	18	22.7	150	7.5	6	8
40	11	20	115	18	21.7	150	7.5	6	8
40	12	20	115	18	20.7	150	7.5	6	8
40	13	20	110	18	24.7	150	7.5	6	8
40	14	20	110	18	23.7	150	7.5	6	8
40	15	20	110	18	22.7	150	7.5	6	8
40	16	20	110	18	21.7	150	7.5	6	8
40	17	20	110	18	20.7	150	7.5	6	8
40	18	20	105	18	24.7	150	7.5	6	8
40	19	20	105	18	23.7	150	7.5	6	8
40	20	20	105	18	22.7	150	7.5	6	8
40	22	20	105	18	20.7	150	7.5	6	8
40	24	20	100	18	23.7	150	7.5	6	8
40	25	20	100	18	22.7	150	7.5	6	8
40	26	20	100	18	21.7	150	7.5	6	8
40	28	20	95	18	24.7	150	7.5	6	8
40	30	20	95	18	22.7	150	7.5	6	8
42	2	20	120	18	25.7	150	8	6	8
42	2.5	20	120	18	25.2	150	8	6	8
42	3	20	120	18	24.7	150	8	6	8
42	3.5	20	120	18	24.2	150	8	6	8
42	4	20	120	18	23.7	150	8	6	8
42	4.5	20	120	18	23.2	150	8	6	8
42	5	20	120	18	22.7	150	8	6	8
42	5.5	20	120	18	22.2	150	8	6	8
42	6	20	120	18	21.7	150	8	6	8
42	7	20	120	18	20.7	150	8	6	8
42	8	20	115	18	24.7	150	8	6	8
42	9	20	115	18	23.7	150	8	6	8
42	10	20	115	18	22.7	150	8	6	8
42	11	20	115	18	21.7	150	8	6	8
42	12	20	115	18	20.7	150	8	6	8
42	13	20	110	18	24.7	150	8	6	8
42	14	20	110	18	23.7	150	8	6	8
42	15	20	110	18	22.7	150	8	6	8
42	16	20	110	18	21.7	150	8	6	8
42	17	20	110	18	20.7	150	8	6	8
42	18	20	105	18	24.7	150	8	6	8
42	19	20	105	18	23.7	150	8	6	8
42	20	20	105	18	22.7	150	8	6	8
42	22	20	105	18	20.7	150	8	6	8
42	24	20	100	18	23.7	150	8	6	8
42	25	20	100	18	22.7	150	8	6	8
42	26	20	100	18	21.7	150	8	6	8
42	28	20	95	18	24.7	150	8	6	8
42	30	20	95	18	22.7	150	8	6	8
45	2	20	120	18	25.7	150	9	7	10

STC-LS

ロング柄千鳥刃Tスロットカッター

Long Shank Staggered Tooth T-Slot Cutter

外径 φ D	刃幅 L c	柄径 φ d	柄長 L 1	首径 φ d 1	首長(フラット) (L 2)	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
45	2.5	20	120	18	25.2	150	9	7	10
45	3	20	120	18	24.7	150	9	7	10
45	3.5	20	120	18	24.2	150	9	7	10
45	4	20	120	18	23.7	150	9	7	10
45	4.5	20	120	18	23.2	150	9	7	10
45	5	20	120	18	22.7	150	9	7	10
45	5.5	20	120	18	22.2	150	9	7	10
45	6	20	120	18	21.7	150	9	7	10
45	7	20	120	18	20.7	150	9	7	10
45	8	20	115	18	24.7	150	9	7	10
45	9	20	115	18	23.7	150	9	7	10
45	10	20	115	18	22.7	150	9	7	10
45	11	20	115	18	21.7	150	9	7	10
45	12	20	115	18	20.7	150	9	7	10
45	13	20	110	18	24.7	150	9	7	10
45	14	20	110	18	23.7	150	9	7	10
45	15	20	110	18	22.7	150	9	7	10
45	16	20	110	18	21.7	150	9	7	10
45	17	20	110	18	20.7	150	9	7	10
45	18	20	105	18	24.7	150	9	7	10
45	19	20	105	18	23.7	150	9	7	10
45	20	20	105	18	22.7	150	9	7	10
45	22	20	105	18	20.7	150	9	7	10
45	24	20	100	18	23.7	150	9	7	10
45	25	20	100	18	22.7	150	9	7	10
45	26	20	100	18	21.7	150	9	7	10
45	28	20	95	18	24.7	150	9	7	10
45	30	20	95	18	22.7	150	9	7	10
48	3	25	150	23	24.7	180	9.5	7.5	10
48	4	25	150	23	23.7	180	9.5	7.5	10
48	5	25	150	23	22.7	180	9.5	7.5	10
48	6	25	150	23	21.7	180	9.5	7.5	10
48	7	25	150	23	20.7	180	9.5	7.5	10
48	8	25	145	23	24.7	180	9.5	7.5	10
48	9	25	145	23	23.7	180	9.5	7.5	10
48	10	25	145	23	22.7	180	9.5	7.5	10
48	12	25	145	23	20.7	180	9.5	7.5	10
48	14	25	140	23	23.7	180	9.5	7.5	10
48	15	25	140	23	22.7	180	9.5	7.5	10
48	16	25	140	23	21.7	180	9.5	7.5	10
48	18	25	135	23	24.7	180	9.5	7.5	10
48	20	25	135	23	22.7	180	9.5	7.5	10
50	2	25	150	23	25.7	180	10	7.5	10
50	2.5	25	150	23	25.2	180	10	7.5	10
50	3	25	150	23	24.7	180	10	7.5	10
50	3.5	25	150	23	24.2	180	10	7.5	10
50	4	25	150	23	23.7	180	10	7.5	10
50	4.5	25	150	23	23.2	180	10	7.5	10
50	5	25	150	23	22.7	180	10	7.5	10
50	5.5	25	150	23	22.2	180	10	7.5	10
50	6	25	150	23	21.7	180	10	7.5	10
50	7	25	150	23	20.7	180	10	7.5	10
50	8	25	145	23	24.7	180	10	7.5	10
50	9	25	145	23	23.7	180	10	7.5	10
50	10	25	145	23	22.7	180	10	7.5	10
50	11	25	145	23	21.7	180	10	7.5	10
50	12	25	145	23	20.7	180	10	7.5	10

STC-LS

ロング柄千鳥刃Tスロットカッター

Long Shank Staggered Tooth T-Slot Cutter

外径 φ D	刃幅 L c	柄径 φ d	柄長 L 1	首径 φ d 1	首長(フラット) (L 2)	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
50	13	25	140	23	24.7	180	10	7.5	10
50	14	25	140	23	23.7	180	10	7.5	10
50	15	25	140	23	22.7	180	10	7.5	10
50	16	25	140	23	21.7	180	10	7.5	10
50	17	25	140	23	20.7	180	10	7.5	10
50	18	25	135	23	24.7	180	10	7.5	10
50	19	25	135	23	23.7	180	10	7.5	10
50	20	25	135	23	22.7	180	10	7.5	10
50	22	25	135	23	20.7	180	10	7.5	10
50	24	25	130	23	23.7	180	10	7.5	10
50	25	25	130	23	22.7	180	10	7.5	10
50	26	25	130	23	21.7	180	10	7.5	10
50	28	25	125	23	24.7	180	10	7.5	10
50	30	25	125	23	22.7	180	10	7.5	10
55	3	32	170	28	23.2	200	11	8.5	10
55	4	32	170	28	22.2	200	11	8.5	10
55	5	32	170	28	21.2	200	11	8.5	10
55	6	32	170	28	20.2	200	11	8.5	10
55	7	32	170	28	19.2	200	11	8.5	10
55	8	32	165	28	23.2	200	11	8.5	10
55	9	32	165	28	22.2	200	11	8.5	10
55	10	32	165	28	21.2	200	11	8.5	10
55	12	32	165	28	19.2	200	11	8.5	10
55	14	32	160	28	22.2	200	11	8.5	10
55	15	32	160	28	21.2	200	11	8.5	10
55	16	32	160	28	20.2	200	11	8.5	10
55	18	32	155	28	23.2	200	11	8.5	10
55	20	32	155	28	21.2	200	11	8.5	10
60	3	32	170	28	23.2	200	12	8.5	12
60	4	32	170	28	22.2	200	12	8.5	12
60	5	32	170	28	21.2	200	12	8.5	12
60	6	32	170	28	20.2	200	12	8.5	12
60	7	32	170	28	19.2	200	12	8.5	12
60	8	32	165	28	23.2	200	12	8.5	12
60	9	32	165	28	22.2	200	12	8.5	12
60	10	32	165	28	21.2	200	12	8.5	12
60	12	32	165	28	19.2	200	12	8.5	12
60	14	32	160	28	22.2	200	12	8.5	12
60	15	32	160	28	21.2	200	12	8.5	12
60	16	32	160	28	20.2	200	12	8.5	12
60	18	32	155	28	23.2	200	12	8.5	12
60	20	32	155	28	21.2	200	12	8.5	12
60	22	32	155	28	19.2	200	12	8.5	12
60	24	32	150	28	22.2	200	12	8.5	12
60	25	32	150	28	21.2	200	12	8.5	12
65	5	32	180	31	53.6	240	13	10	14
65	6	32	180	31	52.6	240	13	10	14
65	7	32	180	31	51.6	240	13	10	14
65	8	32	175	31	55.6	240	13	10	14
65	9	32	175	31	54.6	240	13	10	14
65	10	32	175	31	53.6	240	13	10	14
65	12	32	175	31	51.6	240	13	10	14
65	14	32	170	31	54.6	240	13	10	14
65	15	32	170	31	53.6	240	13	10	14
65	16	32	170	31	52.6	240	13	10	14
65	18	32	165	31	55.6	240	13	10	14

STC-LS

ロング柄千鳥刃Tスロットカッター

Long Shank Staggered Tooth T-Slot Cutter

外径 φ D	刃幅 L c	柄径 φ d	柄長 L 1	首径 φ d 1	首長(フラット) (L 2)	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
65	20	32	165	31	53.6	240	13	10	14
65	22	32	165	31	51.6	240	13	10	14
65	24	32	160	31	54.6	240	13	10	14
65	25	32	160	31	53.6	240	13	10	14
70	5	32	180	31	53.6	240	14	11	14
70	6	32	180	31	52.6	240	14	11	14
70	7	32	180	31	51.6	240	14	11	14
70	8	32	175	31	55.6	240	14	11	14
70	9	32	175	31	54.6	240	14	11	14
70	10	32	175	31	53.6	240	14	11	14
70	12	32	175	31	51.6	240	14	11	14
70	14	32	170	31	54.6	240	14	11	14
70	15	32	170	31	53.6	240	14	11	14
70	16	32	170	31	52.6	240	14	11	14
70	18	32	165	31	55.6	240	14	11	14
70	20	32	165	31	53.6	240	14	11	14
70	22	32	165	31	51.6	240	14	11	14
70	24	32	160	31	54.6	240	14	11	14
70	25	32	160	31	53.6	240	14	11	14
75	5	32	180	31	53.6	240	15.5	12.5	14
75	6	32	180	31	52.6	240	15.5	12.5	14
75	7	32	180	31	51.6	240	15.5	12.5	14
75	8	32	175	31	55.6	240	15.5	12.5	14
75	9	32	175	31	54.6	240	15.5	12.5	14
75	10	32	175	31	53.6	240	15.5	12.5	14
75	12	32	175	31	51.6	240	15.5	12.5	14
75	14	32	170	31	54.6	240	15.5	12.5	14
75	15	32	170	31	53.6	240	15.5	12.5	14
75	16	32	170	31	52.6	240	15.5	12.5	14
75	18	32	165	31	55.6	240	15.5	12.5	14
75	20	32	165	31	53.6	240	15.5	12.5	14
75	22	32	165	31	51.6	240	15.5	12.5	14
75	24	32	160	31	54.6	240	15.5	12.5	14
75	25	32	160	31	53.6	240	15.5	12.5	14
80	5	32	180	31	73.6	260	16	13	16
80	6	32	180	31	72.6	260	16	13	16
80	7	32	180	31	71.6	260	16	13	16
80	8	32	175	31	75.6	260	16	13	16
80	9	32	175	31	74.6	260	16	13	16
80	10	32	175	31	73.6	260	16	13	16
80	12	32	175	31	71.6	260	16	13	16
80	14	32	170	31	74.6	260	16	13	16
80	15	32	170	31	73.6	260	16	13	16
80	16	32	170	31	72.6	260	16	13	16
80	18	32	165	31	75.6	260	16	13	16
80	20	32	165	31	73.6	260	16	13	16
80	22	32	165	31	71.6	260	16	13	16
80	24	32	160	31	74.6	260	16	13	16
80	25	32	160	31	73.6	260	16	13	16
90	5	32	200	31	73.6	280	18	15	18
90	6	32	200	31	72.6	280	18	15	18
90	7	32	200	31	71.6	280	18	15	18
90	8	32	195	31	75.6	280	18	15	18
90	9	32	195	31	74.6	280	18	15	18
90	10	32	195	31	73.6	280	18	15	18

STC-LS

ロング柄千鳥刃Tスロットカッター

Long Shank Staggered Tooth T-Slot Cutter

外径 ϕD	刃幅 L c	柄径 ϕd	柄長 L 1	首径 $\phi d 1$	首長(フラット) (L 2)	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
90	12	32	195	31	71.6	280	18	15	18
90	14	32	190	31	74.6	280	18	15	18
90	15	32	190	31	73.6	280	18	15	18
90	16	32	190	31	72.6	280	18	15	18
90	18	32	185	31	75.6	280	18	15	18
90	20	32	185	31	73.6	280	18	15	18
90	22	32	185	31	71.6	280	18	15	18
90	24	32	180	31	74.6	280	18	15	18
90	25	32	180	31	73.6	280	18	15	18
100	5	32	200	31	73.6	280	20	16.5	18
100	6	32	200	31	72.6	280	20	16.5	18
100	7	32	200	31	71.6	280	20	16.5	18
100	8	32	195	31	75.6	280	20	16.5	18
100	9	32	195	31	74.6	280	20	16.5	18
100	10	32	195	31	73.6	280	20	16.5	18
100	12	32	195	31	71.6	280	20	16.5	18
100	14	32	190	31	74.6	280	20	16.5	18
100	15	32	190	31	73.6	280	20	16.5	18
100	16	32	190	31	72.6	280	20	16.5	18
100	18	32	185	31	75.6	280	20	16.5	18
100	20	32	185	31	73.6	280	20	16.5	18
100	22	32	185	31	71.6	280	20	16.5	18
100	24	32	180	31	74.6	280	20	16.5	18
100	25	32	180	31	73.6	280	20	16.5	18