
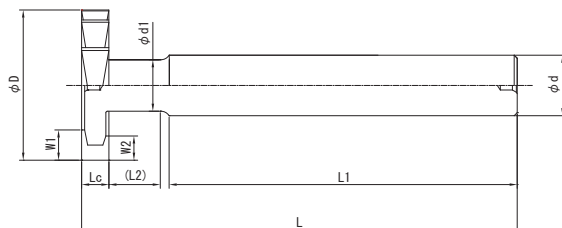


TC-LS

ロング柄Tスロットカッター

Long Shank T-Slot Cutter



SKH56

外径許容差(φD) $+0.10$
 $+0.03$ 刃幅許容差(Lc) $+0.10$
 $+0.03$

外径 φD	刃幅 Lc	柄径 φd	柄長 L1	首径 φd1	首長(フラット) (L2)	全長 L	サイド刃の長さ		刃数
							W1	W2	
10	2	10	103	4	9.5	120	2.5	1.5	6
10	2.5	10	102.5	4	9.5	120	2.5	1.5	6
10	3	10	102	4	9.5	120	2.5	1.5	6
10	3.5	10	101.5	4	9.5	120	2.5	1.5	6
10	4	10	101	4	9.5	120	2.5	1.5	6
10	4.5	10	100.5	4	9.5	120	2.5	1.5	6
10	5	10	100	4	9.5	120	2.5	1.5	6
10	6	10	99	4	9.5	120	2.5	1.5	6
10	7	10	98	4	9.5	120	2.5	1.5	6
10	8	10	97	4	9.5	120	2.5	1.5	6
10	9	10	96	4	9.5	120	2.5	1.5	6
10	10	10	95	4	9.5	120	2.5	1.5	6
10	11	10	94	4	9.5	120	2.5	1.5	6
10	12	10	93	4	9.5	120	2.5	1.5	6
12	2	12	103	5	9.5	120	3	1.75	6
12	2.5	12	102.5	5	9.5	120	3	1.75	6
12	3	12	102	5	9.5	120	3	1.75	6
12	3.5	12	101.5	5	9.5	120	3	1.75	6
12	4	12	101	5	9.5	120	3	1.75	6
12	4.5	12	100.5	5	9.5	120	3	1.75	6
12	5	12	100	5	9.5	120	3	1.75	6
12	6	12	99	5	9.5	120	3	1.75	6
12	7	12	98	5	9.5	120	3	1.75	6
12	8	12	97	5	9.5	120	3	1.75	6
12	9	12	96	5	9.5	120	3	1.75	6
12	10	12	95	5	9.5	120	3	1.75	6
12	11	12	94	5	9.5	120	3	1.75	6
12	12	12	93	5	9.5	120	3	1.75	6
13	2	12	128	6	14.8	150	2.5	1.75	8
13	2.5	12	127.5	6	14.8	150	2.5	1.75	8
13	3	12	127	6	14.8	150	2.5	1.75	8
13	3.5	12	126.5	6	14.8	150	2.5	1.75	8
13	4	12	126	6	14.8	150	2.5	1.75	8
13	4.5	12	125.5	6	14.8	150	2.5	1.75	8
13	5	12	125	6	14.8	150	2.5	1.75	8
13	6	12	124	6	14.8	150	2.5	1.75	8
13	7	12	123	6	14.8	150	2.5	1.75	8
13	8	12	122	6	14.8	150	2.5	1.75	8

被削材種 型番	硬度	鋳物	炭素鋼	合金鋼	工具鋼	調質鋼	ステンレス鋼	アルミ合金	銅合金	チタン合金	耐熱合金
		FC、FCD	S45C	SCM	SKD	NAK、HPM	SUS	Al	Cu	Ti6Al4V	インコネル
TC-LS	~200HB	○	○	○	△		○	○	○		

首長(L2)寸法は、首径(φd1)と柄径(φd)のつなぎがRのため参考値です。

切削条件 P.285

両側面のヌスミ(ニゲ)の深さ P.304

TC-LS

ロング柄Tスロットカッター

Long Shank T-Slot Cutter

外径 φD	刃幅 L c	柄径 φ d	柄長 L 1	首径 φ d 1	首長(フラット) (L 2)	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
13	9	12	121	6	14.8	150	2.5	1.75	8
13	10	12	120	6	14.8	150	2.5	1.75	8
13	11	12	119	6	14.8	150	2.5	1.75	8
13	12	12	118	6	14.8	150	2.5	1.75	8
14	2	12	128	6	14.8	150	2.5	1.75	8
14	2.5	12	127.5	6	14.8	150	2.5	1.75	8
14	3	12	127	6	14.8	150	2.5	1.75	8
14	3.5	12	126.5	6	14.8	150	2.5	1.75	8
14	4	12	126	6	14.8	150	2.5	1.75	8
14	4.5	12	125.5	6	14.8	150	2.5	1.75	8
14	5	12	125	6	14.8	150	2.5	1.75	8
14	6	12	124	6	14.8	150	2.5	1.75	8
14	7	12	123	6	14.8	150	2.5	1.75	8
14	8	12	122	6	14.8	150	2.5	1.75	8
14	9	12	121	6	14.8	150	2.5	1.75	8
14	10	12	120	6	14.8	150	2.5	1.75	8
14	11	12	119	6	14.8	150	2.5	1.75	8
14	12	12	118	6	14.8	150	2.5	1.75	8
15	2	12	128	6	14.8	150	3	2.25	8
15	2.5	12	127.5	6	14.8	150	3	2.25	8
15	3	12	127	6	14.8	150	3	2.25	8
15	3.5	12	126.5	6	14.8	150	3	2.25	8
15	4	12	126	6	14.8	150	3	2.25	8
15	4.5	12	125.5	6	14.8	150	3	2.25	8
15	5	12	125	6	14.8	150	3	2.25	8
15	6	12	124	6	14.8	150	3	2.25	8
15	7	12	123	6	14.8	150	3	2.25	8
15	8	12	122	6	14.8	150	3	2.25	8
15	9	12	121	6	14.8	150	3	2.25	8
15	10	12	120	6	14.8	150	3	2.25	8
15	11	12	119	6	14.8	150	3	2.25	8
15	12	12	118	6	14.8	150	3	2.25	8
16	2	12	128	7	15.9	150	3	2.25	8
16	2.5	12	127.5	7	15.9	150	3	2.25	8
16	3	12	127	7	15.9	150	3	2.25	8
16	3.5	12	126.5	7	15.9	150	3	2.25	8
16	4	12	126	7	15.9	150	3	2.25	8
16	4.5	12	125.5	7	15.9	150	3	2.25	8
16	5	12	125	7	15.9	150	3	2.25	8
16	6	12	124	7	15.9	150	3	2.25	8
16	7	12	123	7	15.9	150	3	2.25	8
16	8	12	122	7	15.9	150	3	2.25	8
16	9	12	121	7	15.9	150	3	2.25	8
16	10	12	120	7	15.9	150	3	2.25	8
16	11	12	119	7	15.9	150	3	2.25	8
16	12	12	118	7	15.9	150	3	2.25	8
18	2	12	128	8.5	16.6	150	3.5	2.5	8
18	2.5	12	127.5	8.5	16.6	150	3.5	2.5	8
18	3	12	127	8.5	16.6	150	3.5	2.5	8
18	3.5	12	126.5	8.5	16.6	150	3.5	2.5	8
18	4	12	126	8.5	16.6	150	3.5	2.5	8
18	4.5	12	125.5	8.5	16.6	150	3.5	2.5	8
18	5	12	125	8.5	16.6	150	3.5	2.5	8
18	6	12	124	8.5	16.6	150	3.5	2.5	8
18	7	12	123	8.5	16.6	150	3.5	2.5	8

TC-LS

ロング柄Tスロットカッター

Long Shank T-Slot Cutter

外径 φ D	刃幅 L c	柄径 φ d	柄長 L 1	首径 φ d 1	首長(フラット) (L 2)	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
18	8	12	122	8.5	16.6	150	3.5	2.5	8
18	9	12	121	8.5	16.6	150	3.5	2.5	8
18	10	12	120	8.5	16.6	150	3.5	2.5	8
18	11	12	119	8.5	16.6	150	3.5	2.5	8
18	12	12	118	8.5	16.6	150	3.5	2.5	8
19	2	12	126	10	19.7	150	3.5	2.75	8
19	2.5	12	125.5	10	19.7	150	3.5	2.75	8
19	3	12	125	10	19.7	150	3.5	2.75	8
19	3.5	12	124.5	10	19.7	150	3.5	2.75	8
19	4	12	124	10	19.7	150	3.5	2.75	8
19	4.5	12	123.5	10	19.7	150	3.5	2.75	8
19	5	12	123	10	19.7	150	3.5	2.75	8
19	6	12	122	10	19.7	150	3.5	2.75	8
19	7	12	121	10	19.7	150	3.5	2.75	8
19	8	12	120	10	19.7	150	3.5	2.75	8
19	9	12	119	10	19.7	150	3.5	2.75	8
19	10	12	118	10	19.7	150	3.5	2.75	8
19	11	12	117	10	19.7	150	3.5	2.75	8
19	12	12	116	10	19.7	150	3.5	2.75	8
20	2	12	126	10	19.7	150	4	3	8
20	2.5	12	125.5	10	19.7	150	4	3	8
20	3	12	125	10	19.7	150	4	3	8
20	3.5	12	124.5	10	19.7	150	4	3	8
20	4	12	124	10	19.7	150	4	3	8
20	4.5	12	123.5	10	19.7	150	4	3	8
20	5	12	123	10	19.7	150	4	3	8
20	6	12	122	10	19.7	150	4	3	8
20	7	12	121	10	19.7	150	4	3	8
20	8	12	120	10	19.7	150	4	3	8
20	9	12	119	10	19.7	150	4	3	8
20	10	12	118	10	19.7	150	4	3	8
20	11	12	117	10	19.7	150	4	3	8
20	12	12	116	10	19.7	150	4	3	8
20	13	12	115	10	19.7	150	4	3	8
20	14	12	114	10	19.7	150	4	3	8
20	15	12	113	10	19.7	150	4	3	8
20	16	12	112	10	19.7	150	4	3	8
22	2	16	126	10	16.8	150	4.5	3	10
22	2.5	16	125.5	10	16.8	150	4.5	3	10
22	3	16	125	10	16.8	150	4.5	3	10
22	3.5	16	124.5	10	16.8	150	4.5	3	10
22	4	16	124	10	16.8	150	4.5	3	10
22	4.5	16	123.5	10	16.8	150	4.5	3	10
22	5	16	123	10	16.8	150	4.5	3	10
22	6	16	122	10	16.8	150	4.5	3	10
22	7	16	121	10	16.8	150	4.5	3	10
22	8	16	120	10	16.8	150	4.5	3	10
22	9	16	119	10	16.8	150	4.5	3	10
22	10	16	118	10	16.8	150	4.5	3	10
22	11	16	117	10	16.8	150	4.5	3	10
22	12	16	116	10	16.8	150	4.5	3	10
22	13	16	115	10	16.8	150	4.5	3	10
22	14	16	114	10	16.8	150	4.5	3	10
22	15	16	113	10	16.8	150	4.5	3	10
22	16	16	112	10	16.8	150	4.5	3	10

TC-LS

ロング柄Tスロットカッター

Long Shank T-Slot Cutter

外径 φ D	刃幅 L c	柄径 φ d	柄長 L 1	首径 φ d 1	首長(フラット) (L 2)	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
24	2	16	124	11	19.9	150	4.5	3	10
24	2.5	16	123.5	11	19.9	150	4.5	3	10
24	3	16	123	11	19.9	150	4.5	3	10
24	3.5	16	122.5	11	19.9	150	4.5	3	10
24	4	16	122	11	19.9	150	4.5	3	10
24	4.5	16	121.5	11	19.9	150	4.5	3	10
24	5	16	121	11	19.9	150	4.5	3	10
24	6	16	120	11	19.9	150	4.5	3	10
24	7	16	119	11	19.9	150	4.5	3	10
24	8	16	118	11	19.9	150	4.5	3	10
24	9	16	117	11	19.9	150	4.5	3	10
24	10	16	116	11	19.9	150	4.5	3	10
24	11	16	115	11	19.9	150	4.5	3	10
24	12	16	114	11	19.9	150	4.5	3	10
24	13	16	113	11	19.9	150	4.5	3	10
24	14	16	112	11	19.9	150	4.5	3	10
24	15	16	111	11	19.9	150	4.5	3	10
24	16	16	110	11	19.9	150	4.5	3	10
25	2	16	124	14	21.7	150	4.5	3	10
25	2.5	16	123.5	14	21.7	150	4.5	3	10
25	3	16	123	14	21.7	150	4.5	3	10
25	3.5	16	122.5	14	21.7	150	4.5	3	10
25	4	16	122	14	21.7	150	4.5	3	10
25	4.5	16	121.5	14	21.7	150	4.5	3	10
25	5	16	121	14	21.7	150	4.5	3	10
25	6	16	120	14	21.7	150	4.5	3	10
25	7	16	119	14	21.7	150	4.5	3	10
25	8	16	118	14	21.7	150	4.5	3	10
25	9	16	117	14	21.7	150	4.5	3	10
25	10	16	116	14	21.7	150	4.5	3	10
25	11	16	115	14	21.7	150	4.5	3	10
25	12	16	114	14	21.7	150	4.5	3	10
25	13	16	113	14	21.7	150	4.5	3	10
25	14	16	112	14	21.7	150	4.5	3	10
25	15	16	111	14	21.7	150	4.5	3	10
25	16	16	110	14	21.7	150	4.5	3	10
25	18	16	108	14	21.7	150	4.5	3	10
25	20	16	106	14	21.7	150	4.5	3	10
26	2	16	124	14	21.7	150	4.5	3	10
26	2.5	16	123.5	14	21.7	150	4.5	3	10
26	3	16	123	14	21.7	150	4.5	3	10
26	3.5	16	122.5	14	21.7	150	4.5	3	10
26	4	16	122	14	21.7	150	4.5	3	10
26	4.5	16	121.5	14	21.7	150	4.5	3	10
26	5	16	121	14	21.7	150	4.5	3	10
26	6	16	120	14	21.7	150	4.5	3	10
26	7	16	119	14	21.7	150	4.5	3	10
26	8	16	118	14	21.7	150	4.5	3	10
26	9	16	117	14	21.7	150	4.5	3	10
26	10	16	116	14	21.7	150	4.5	3	10
26	11	16	115	14	21.7	150	4.5	3	10
26	12	16	114	14	21.7	150	4.5	3	10
26	13	16	113	14	21.7	150	4.5	3	10
26	14	16	112	14	21.7	150	4.5	3	10
26	15	16	111	14	21.7	150	4.5	3	10
26	16	16	110	14	21.7	150	4.5	3	10

TC-LS

ロング柄Tスロットカッター

Long Shank T-Slot Cutter

外径 φ D	刃幅 L c	柄径 φ d	柄長 L 1	首径 φ d 1	首長(フラット) (L 2)	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
28	2	16	124	14	21.7	150	5	3.5	10
28	2.5	16	123.5	14	21.7	150	5	3.5	10
28	3	16	123	14	21.7	150	5	3.5	10
28	3.5	16	122.5	14	21.7	150	5	3.5	10
28	4	16	122	14	21.7	150	5	3.5	10
28	4.5	16	121.5	14	21.7	150	5	3.5	10
28	5	16	121	14	21.7	150	5	3.5	10
28	6	16	120	14	21.7	150	5	3.5	10
28	7	16	119	14	21.7	150	5	3.5	10
28	8	16	118	14	21.7	150	5	3.5	10
28	9	16	117	14	21.7	150	5	3.5	10
28	10	16	116	14	21.7	150	5	3.5	10
28	11	16	115	14	21.7	150	5	3.5	10
28	12	16	114	14	21.7	150	5	3.5	10
28	13	16	113	14	21.7	150	5	3.5	10
28	14	16	112	14	21.7	150	5	3.5	10
28	15	16	111	14	21.7	150	5	3.5	10
28	16	16	110	14	21.7	150	5	3.5	10
28	18	16	108	14	21.7	150	5	3.5	10
28	20	16	106	14	21.7	150	5	3.5	10
30	2	16	124	14	21.7	150	5.5	4	10
30	2.5	16	123.5	14	21.7	150	5.5	4	10
30	3	16	123	14	21.7	150	5.5	4	10
30	3.5	16	122.5	14	21.7	150	5.5	4	10
30	4	16	122	14	21.7	150	5.5	4	10
30	4.5	16	121.5	14	21.7	150	5.5	4	10
30	5	16	121	14	21.7	150	5.5	4	10
30	6	16	120	14	21.7	150	5.5	4	10
30	7	16	119	14	21.7	150	5.5	4	10
30	8	16	118	14	21.7	150	5.5	4	10
30	9	16	117	14	21.7	150	5.5	4	10
30	10	16	116	14	21.7	150	5.5	4	10
30	11	16	115	14	21.7	150	5.5	4	10
30	12	16	114	14	21.7	150	5.5	4	10
30	13	16	113	14	21.7	150	5.5	4	10
30	14	16	112	14	21.7	150	5.5	4	10
30	15	16	111	14	21.7	150	5.5	4	10
30	16	16	110	14	21.7	150	5.5	4	10
30	18	16	108	14	21.7	150	5.5	4	10
30	20	16	106	14	21.7	150	5.5	4	10
32	2	20	120	16	24.2	150	6	4	10
32	2.5	20	119.5	16	24.2	150	6	4	10
32	3	20	119	16	24.2	150	6	4	10
32	3.5	20	118.5	16	24.2	150	6	4	10
32	4	20	118	16	24.2	150	6	4	10
32	4.5	20	117.5	16	24.2	150	6	4	10
32	5	20	117	16	24.2	150	6	4	10
32	6	20	116	16	24.2	150	6	4	10
32	7	20	115	16	24.2	150	6	4	10
32	8	20	114	16	24.2	150	6	4	10
32	9	20	113	16	24.2	150	6	4	10
32	10	20	112	16	24.2	150	6	4	10
32	11	20	111	16	24.2	150	6	4	10
32	12	20	110	16	24.2	150	6	4	10
32	13	20	109	16	24.2	150	6	4	10
32	14	20	108	16	24.2	150	6	4	10
32	15	20	107	16	24.2	150	6	4	10

TC-LS

ロング柄Tスロットカッター

Long Shank T-Slot Cutter

外径 φ D	刃幅 L c	柄径 φ d	柄長 L 1	首径 φ d 1	首長(フラット) (L 2)	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
32	16	20	106	16	24.2	150	6	4	10
32	17	20	105	16	24.2	150	6	4	10
32	18	20	104	16	24.2	150	6	4	10
32	19	20	103	16	24.2	150	6	4	10
32	20	20	102	16	24.2	150	6	4	10
35	2	20	120	16	24.2	150	6	4.5	12
35	2.5	20	119.5	16	24.2	150	6	4.5	12
35	3	20	119	16	24.2	150	6	4.5	12
35	3.5	20	118.5	16	24.2	150	6	4.5	12
35	4	20	118	16	24.2	150	6	4.5	12
35	4.5	20	117.5	16	24.2	150	6	4.5	12
35	5	20	117	16	24.2	150	6	4.5	12
35	6	20	116	16	24.2	150	6	4.5	12
35	7	20	115	16	24.2	150	6	4.5	12
35	8	20	114	16	24.2	150	6	4.5	12
35	9	20	113	16	24.2	150	6	4.5	12
35	10	20	112	16	24.2	150	6	4.5	12
35	11	20	111	16	24.2	150	6	4.5	12
35	12	20	110	16	24.2	150	6	4.5	12
35	13	20	109	16	24.2	150	6	4.5	12
35	14	20	108	16	24.2	150	6	4.5	12
35	15	20	107	16	24.2	150	6	4.5	12
35	16	20	106	16	24.2	150	6	4.5	12
35	18	20	104	16	24.2	150	6	4.5	12
35	20	20	102	16	24.2	150	6	4.5	12
36	2	20	120	16	24.2	150	6.5	5	12
36	2.5	20	119.5	16	24.2	150	6.5	5	12
36	3	20	119	16	24.2	150	6.5	5	12
36	3.5	20	118.5	16	24.2	150	6.5	5	12
36	4	20	118	16	24.2	150	6.5	5	12
36	4.5	20	117.5	16	24.2	150	6.5	5	12
36	5	20	117	16	24.2	150	6.5	5	12
36	6	20	116	16	24.2	150	6.5	5	12
36	7	20	115	16	24.2	150	6.5	5	12
36	8	20	114	16	24.2	150	6.5	5	12
36	9	20	113	16	24.2	150	6.5	5	12
36	10	20	112	16	24.2	150	6.5	5	12
36	11	20	111	16	24.2	150	6.5	5	12
36	12	20	110	16	24.2	150	6.5	5	12
36	13	20	109	16	24.2	150	6.5	5	12
36	14	20	108	16	24.2	150	6.5	5	12
36	15	20	107	16	24.2	150	6.5	5	12
36	16	20	106	16	24.2	150	6.5	5	12
36	18	20	104	16	24.2	150	6.5	5	12
36	20	20	102	16	24.2	150	6.5	5	12
38	2	25	144	18	28.5	180	7	5.5	12
38	2.5	25	143.5	18	28.5	180	7	5.5	12
38	3	25	143	18	28.5	180	7	5.5	12
38	3.5	25	142.5	18	28.5	180	7	5.5	12
38	4	25	142	18	28.5	180	7	5.5	12
38	4.5	25	141.5	18	28.5	180	7	5.5	12
38	5	25	141	18	28.5	180	7	5.5	12
38	6	25	140	18	28.5	180	7	5.5	12
38	7	25	139	18	28.5	180	7	5.5	12
38	8	25	138	18	28.5	180	7	5.5	12
38	9	25	137	18	28.5	180	7	5.5	12

TC-LS

ロング柄Tスロットカッター

Long Shank T-Slot Cutter

外径 φ D	刃幅 L c	柄径 φ d	柄長 L 1	首径 φ d 1	首長(フラット) (L 2)	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
38	10	25	136	18	28.5	180	7	5.5	12
38	11	25	135	18	28.5	180	7	5.5	12
38	12	25	134	18	28.5	180	7	5.5	12
38	13	25	133	18	28.5	180	7	5.5	12
38	14	25	132	18	28.5	180	7	5.5	12
38	15	25	131	18	28.5	180	7	5.5	12
38	16	25	130	18	28.5	180	7	5.5	12
38	18	25	128	18	28.5	180	7	5.5	12
38	20	25	126	18	28.5	180	7	5.5	12
40	2	25	144	19	28.8	180	7.5	6	12
40	2.5	25	143.5	19	28.8	180	7.5	6	12
40	3	25	143	19	28.8	180	7.5	6	12
40	3.5	25	142.5	19	28.8	180	7.5	6	12
40	4	25	142	19	28.8	180	7.5	6	12
40	4.5	25	141.5	19	28.8	180	7.5	6	12
40	5	25	141	19	28.8	180	7.5	6	12
40	6	25	140	19	28.8	180	7.5	6	12
40	7	25	139	19	28.8	180	7.5	6	12
40	8	25	138	19	28.8	180	7.5	6	12
40	9	25	137	19	28.8	180	7.5	6	12
40	10	25	136	19	28.8	180	7.5	6	12
40	11	25	135	19	28.8	180	7.5	6	12
40	12	25	134	19	28.8	180	7.5	6	12
40	13	25	133	19	28.8	180	7.5	6	12
40	14	25	132	19	28.8	180	7.5	6	12
40	15	25	131	19	28.8	180	7.5	6	12
40	16	25	130	19	28.8	180	7.5	6	12
40	18	25	128	19	28.8	180	7.5	6	12
40	20	25	126	19	28.8	180	7.5	6	12
40	22	25	124	19	28.8	180	7.5	6	12
40	24	25	122	19	28.8	180	7.5	6	12
40	25	25	121	19	28.8	180	7.5	6	12
40	26	25	120	19	28.8	180	7.5	6	12
40	28	25	118	19	28.8	180	7.5	6	12
40	30	25	116	19	28.8	180	7.5	6	12
42	2	25	140	20	33.9	180	8	6	12
42	2.5	25	139.5	20	33.9	180	8	6	12
42	3	25	139	20	33.9	180	8	6	12
42	3.5	25	138.5	20	33.9	180	8	6	12
42	4	25	138	20	33.9	180	8	6	12
42	4.5	25	137.5	20	33.9	180	8	6	12
42	5	25	137	20	33.9	180	8	6	12
42	6	25	136	20	33.9	180	8	6	12
42	7	25	135	20	33.9	180	8	6	12
42	8	25	134	20	33.9	180	8	6	12
42	9	25	133	20	33.9	180	8	6	12
42	10	25	132	20	33.9	180	8	6	12
42	11	25	131	20	33.9	180	8	6	12
42	12	25	130	20	33.9	180	8	6	12
42	13	25	129	20	33.9	180	8	6	12
42	14	25	128	20	33.9	180	8	6	12
42	15	25	127	20	33.9	180	8	6	12
42	16	25	126	20	33.9	180	8	6	12
42	18	25	124	20	33.9	180	8	6	12
42	20	25	122	20	33.9	180	8	6	12
42	22	25	120	20	33.9	180	8	6	12
42	24	25	118	20	33.9	180	8	6	12

TC-LS

ロング柄Tスロットカッター

Long Shank T-Slot Cutter

外径 φ D	刃幅 L c	柄径 φ d	柄長 L 1	首径 φ d 1	首長(フラット) (L 2)	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
42	25	25	117	20	33.9	180	8	6	12
42	26	25	116	20	33.9	180	8	6	12
42	28	25	114	20	33.9	180	8	6	12
42	30	25	112	20	33.9	180	8	6	12
45	2	25	140	20	33.9	180	9	7	12
45	2.5	25	139.5	20	33.9	180	9	7	12
45	3	25	139	20	33.9	180	9	7	12
45	3.5	25	138.5	20	33.9	180	9	7	12
45	4	25	138	20	33.9	180	9	7	12
45	4.5	25	137.5	20	33.9	180	9	7	12
45	5	25	137	20	33.9	180	9	7	12
45	6	25	136	20	33.9	180	9	7	12
45	7	25	135	20	33.9	180	9	7	12
45	8	25	134	20	33.9	180	9	7	12
45	9	25	133	20	33.9	180	9	7	12
45	10	25	132	20	33.9	180	9	7	12
45	11	25	131	20	33.9	180	9	7	12
45	12	25	130	20	33.9	180	9	7	12
45	13	25	129	20	33.9	180	9	7	12
45	14	25	128	20	33.9	180	9	7	12
45	15	25	127	20	33.9	180	9	7	12
45	16	25	126	20	33.9	180	9	7	12
45	18	25	124	20	33.9	180	9	7	12
45	20	25	122	20	33.9	180	9	7	12
45	22	25	120	20	33.9	180	9	7	12
45	24	25	118	20	33.9	180	9	7	12
45	25	25	117	20	33.9	180	9	7	12
45	26	25	116	20	33.9	180	9	7	12
45	28	25	114	20	33.9	180	9	7	12
45	30	25	112	20	33.9	180	9	7	12
48	2	25	138	20	35.9	180	9.5	7.5	12
48	2.5	25	137.5	20	35.9	180	9.5	7.5	12
48	3	25	137	20	35.9	180	9.5	7.5	12
48	3.5	25	136.5	20	35.9	180	9.5	7.5	12
48	4	25	136	20	35.9	180	9.5	7.5	12
48	4.5	25	135.5	20	35.9	180	9.5	7.5	12
48	5	25	135	20	35.9	180	9.5	7.5	12
48	6	25	134	20	35.9	180	9.5	7.5	12
48	7	25	133	20	35.9	180	9.5	7.5	12
48	8	25	132	20	35.9	180	9.5	7.5	12
48	9	25	131	20	35.9	180	9.5	7.5	12
48	10	25	130	20	35.9	180	9.5	7.5	12
48	11	25	129	20	35.9	180	9.5	7.5	12
48	12	25	128	20	35.9	180	9.5	7.5	12
48	13	25	127	20	35.9	180	9.5	7.5	12
48	14	25	126	20	35.9	180	9.5	7.5	12
48	15	25	125	20	35.9	180	9.5	7.5	12
48	16	25	124	20	35.9	180	9.5	7.5	12
48	18	25	122	20	35.9	180	9.5	7.5	12
48	20	25	120	20	35.9	180	9.5	7.5	12
48	22	25	118	20	35.9	180	9.5	7.5	12
48	24	25	116	20	35.9	180	9.5	7.5	12
48	25	25	115	20	35.9	180	9.5	7.5	12
48	26	25	114	20	35.9	180	9.5	7.5	12
48	28	25	112	20	35.9	180	9.5	7.5	12
48	30	25	110	20	35.9	180	9.5	7.5	12

TC-LS

ロング柄Tスロットカッター

Long Shank T-Slot Cutter

外径 φ D	刃幅 L c	柄径 φ d	柄長 L 1	首径 φ d 1	首長(フラット) (L 2)	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
50	2	25	138	23	37.7	180	10	7.5	14
50	2.5	25	137.5	23	37.7	180	10	7.5	14
50	3	25	137	23	37.7	180	10	7.5	14
50	3.5	25	136.5	23	37.7	180	10	7.5	14
50	4	25	136	23	37.7	180	10	7.5	14
50	4.5	25	135.5	23	37.7	180	10	7.5	14
50	5	25	135	23	37.7	180	10	7.5	14
50	6	25	134	23	37.7	180	10	7.5	14
50	7	25	133	23	37.7	180	10	7.5	14
50	8	25	132	23	37.7	180	10	7.5	14
50	9	25	131	23	37.7	180	10	7.5	14
50	10	25	130	23	37.7	180	10	7.5	14
50	11	25	129	23	37.7	180	10	7.5	14
50	12	25	128	23	37.7	180	10	7.5	14
50	13	25	127	23	37.7	180	10	7.5	14
50	14	25	126	23	37.7	180	10	7.5	14
50	15	25	125	23	37.7	180	10	7.5	14
50	16	25	124	23	37.7	180	10	7.5	14
50	18	25	122	23	37.7	180	10	7.5	14
50	20	25	120	23	37.7	180	10	7.5	14
50	22	25	118	23	37.7	180	10	7.5	14
50	24	25	116	23	37.7	180	10	7.5	14
50	25	25	115	23	37.7	180	10	7.5	14
50	26	25	114	23	37.7	180	10	7.5	14
50	28	25	112	23	37.7	180	10	7.5	14
50	30	25	110	23	37.7	180	10	7.5	14
55	3	25	132	24.5	44	180	11	8.5	14
55	3.5	25	131.5	24.5	44	180	11	8.5	14
55	4	25	131	24.5	44	180	11	8.5	14
55	4.5	25	130.5	24.5	44	180	11	8.5	14
55	5	25	130	24.5	44	180	11	8.5	14
55	6	25	129	24.5	44	180	11	8.5	14
55	7	25	128	24.5	44	180	11	8.5	14
55	8	25	127	24.5	44	180	11	8.5	14
55	9	25	126	24.5	44	180	11	8.5	14
55	10	25	125	24.5	44	180	11	8.5	14
55	11	25	124	24.5	44	180	11	8.5	14
55	12	25	123	24.5	44	180	11	8.5	14
55	13	25	122	24.5	44	180	11	8.5	14
55	14	25	121	24.5	44	180	11	8.5	14
55	15	25	120	24.5	44	180	11	8.5	14
55	16	25	119	24.5	44	180	11	8.5	14
55	18	25	117	24.5	44	180	11	8.5	14
55	20	25	115	24.5	44	180	11	8.5	14
55	22	25	113	24.5	44	180	11	8.5	14
55	24	25	111	24.5	44	180	11	8.5	14
55	25	25	110	24.5	44	180	11	8.5	14
55	26	25	109	24.5	44	180	11	8.5	14
55	28	25	107	24.5	44	180	11	8.5	14
55	30	25	105	24.5	44	180	11	8.5	14
60	3	32	132	28	41.2	180	12	8.5	14
60	3.5	32	131.5	28	41.2	180	12	8.5	14
60	4	32	131	28	41.2	180	12	8.5	14
60	4.5	32	130.5	28	41.2	180	12	8.5	14
60	5	32	130	28	41.2	180	12	8.5	14
60	6	32	129	28	41.2	180	12	8.5	14
60	7	32	128	28	41.2	180	12	8.5	14

TC-LS

ロング柄Tスロットカッター

Long Shank T-Slot Cutter

外径 φ D	刃幅 L c	柄径 φ d	柄長 L 1	首径 φ d 1	首長(フラット) (L 2)	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
60	8	32	127	28	41.2	180	12	8.5	14
60	9	32	126	28	41.2	180	12	8.5	14
60	10	32	125	28	41.2	180	12	8.5	14
60	11	32	124	28	41.2	180	12	8.5	14
60	12	32	123	28	41.2	180	12	8.5	14
60	13	32	122	28	41.2	180	12	8.5	14
60	14	32	121	28	41.2	180	12	8.5	14
60	15	32	120	28	41.2	180	12	8.5	14
60	16	32	119	28	41.2	180	12	8.5	14
60	18	32	117	28	41.2	180	12	8.5	14
60	20	32	115	28	41.2	180	12	8.5	14
60	22	32	113	28	41.2	180	12	8.5	14
60	24	32	111	28	41.2	180	12	8.5	14
60	25	32	110	28	41.2	180	12	8.5	14
60	26	32	109	28	41.2	180	12	8.5	14
60	28	32	107	28	41.2	180	12	8.5	14
60	30	32	105	28	41.2	180	12	8.5	14
65	3	32	172	28	41.2	220	13	10	16
65	4	32	171	28	41.2	220	13	10	16
65	5	32	170	28	41.2	220	13	10	16
65	6	32	169	28	41.2	220	13	10	16
65	7	32	168	28	41.2	220	13	10	16
65	8	32	167	28	41.2	220	13	10	16
65	9	32	166	28	41.2	220	13	10	16
65	10	32	165	28	41.2	220	13	10	16
65	11	32	164	28	41.2	220	13	10	16
65	12	32	163	28	41.2	220	13	10	16
65	13	32	162	28	41.2	220	13	10	16
65	14	32	161	28	41.2	220	13	10	16
65	15	32	160	28	41.2	220	13	10	16
65	16	32	159	28	41.2	220	13	10	16
65	18	32	157	28	41.2	220	13	10	16
65	20	32	155	28	41.2	220	13	10	16
65	22	32	153	28	41.2	220	13	10	16
65	24	32	151	28	41.2	220	13	10	16
65	25	32	150	28	41.2	220	13	10	16
65	26	32	149	28	41.2	220	13	10	16
65	28	32	147	28	41.2	220	13	10	16
65	30	32	145	28	41.2	220	13	10	16
70	3	32	172	28	41.2	220	14	11	16
70	3.5	32	171.5	28	41.2	220	14	11	16
70	4	32	171	28	41.2	220	14	11	16
70	5	32	170	28	41.2	220	14	11	16
70	6	32	169	28	41.2	220	14	11	16
70	7	32	168	28	41.2	220	14	11	16
70	8	32	167	28	41.2	220	14	11	16
70	9	32	166	28	41.2	220	14	11	16
70	10	32	165	28	41.2	220	14	11	16
70	11	32	164	28	41.2	220	14	11	16
70	12	32	163	28	41.2	220	14	11	16
70	13	32	162	28	41.2	220	14	11	16
70	14	32	161	28	41.2	220	14	11	16
70	15	32	160	28	41.2	220	14	11	16
70	16	32	159	28	41.2	220	14	11	16
70	18	32	157	28	41.2	220	14	11	16
70	20	32	155	28	41.2	220	14	11	16
70	22	32	153	28	41.2	220	14	11	16

TC-LS

ロング柄Tスロットカッター

Long Shank T-Slot Cutter

外径 ϕD	刃幅 L c	柄径 ϕd	柄長 L 1	首径 $\phi d 1$	首長(フラット) (L 2)	全長 L	サイド刃の長さ		刃数
							W 1	W 2	
70	24	32	151	28	41.2	220	14	11	16
70	25	32	150	28	41.2	220	14	11	16
70	26	32	149	28	41.2	220	14	11	16
70	28	32	147	28	41.2	220	14	11	16
70	30	32	145	28	41.2	220	14	11	16
75	3	32	182	30	42.7	230	15.5	12.5	16
75	3.5	32	181.5	30	42.7	230	15.5	12.5	16
75	4	32	181	30	42.7	230	15.5	12.5	16
75	5	32	180	30	42.7	230	15.5	12.5	16
75	6	32	179	30	42.7	230	15.5	12.5	16
75	7	32	178	30	42.7	230	15.5	12.5	16
75	8	32	177	30	42.7	230	15.5	12.5	16
75	9	32	176	30	42.7	230	15.5	12.5	16
75	10	32	175	30	42.7	230	15.5	12.5	16
75	11	32	174	30	42.7	230	15.5	12.5	16
75	12	32	173	30	42.7	230	15.5	12.5	16
75	13	32	172	30	42.7	230	15.5	12.5	16
75	14	32	171	30	42.7	230	15.5	12.5	16
75	15	32	170	30	42.7	230	15.5	12.5	16
75	16	32	169	30	42.7	230	15.5	12.5	16
75	18	32	167	30	42.7	230	15.5	12.5	16
75	20	32	165	30	42.7	230	15.5	12.5	16
75	22	32	163	30	42.7	230	15.5	12.5	16
75	24	32	161	30	42.7	230	15.5	12.5	16
75	25	32	160	30	42.7	230	15.5	12.5	16
75	26	32	159	30	42.7	230	15.5	12.5	16
75	28	32	157	30	42.7	230	15.5	12.5	16
75	30	32	155	30	42.7	230	15.5	12.5	16